

The GERDA Experiment for the Search of Neutrinoless Double Beta Decay




Manuel Walter for the GERDA collaboration





Discrete Conference, 2.- 6. December 2014, London

Experiment Site

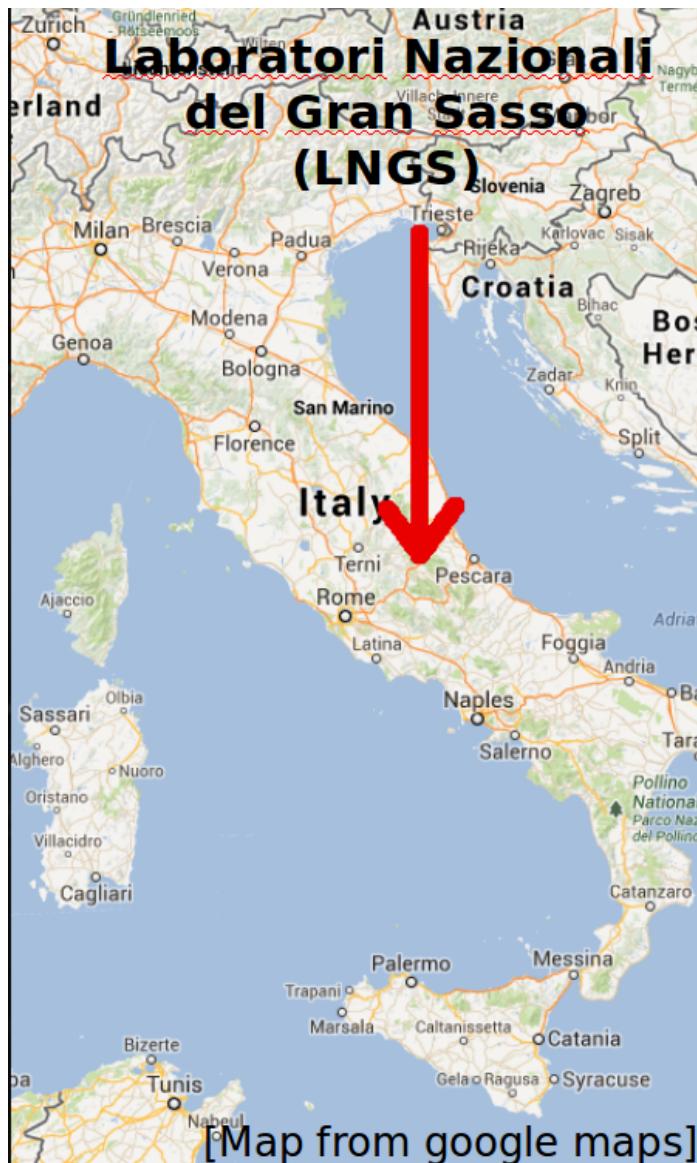

GERDA employs Ge detectors enriched in ^{76}Ge doing double beta decay => detector = source

Double Beta Decay

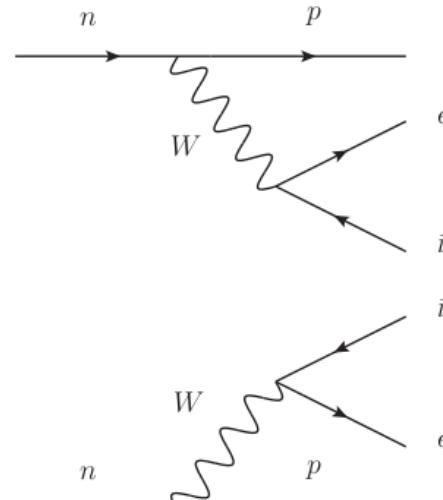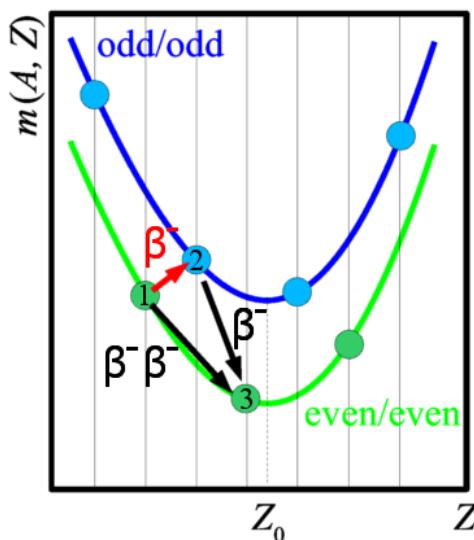


Standard Model $2\nu 2\beta$ decay:

- ▶ known for: ^{48}Ca , ^{76}Ge , ^{82}Se , ^{96}Zr , ^{100}Mo , ^{116}Cd , ^{128}Te , ^{130}Te , ^{150}Nd , ^{238}U , ^{130}Ba , ^{136}Xe
- ▶ $T_{1/2}(2\nu)$ in the range of 10^{18-24} yr
- ▶ ^{76}Ge : $T_{2\nu} = 1.8^{+0.14}_{-0.10} \cdot 10^{25}$ yr [1]

GERDA is searching for the $0\nu 2\beta$ decay.

If it is discovered:


- ▶ lepton number is violated ($\Delta L = 2$)
- ▶ requires physics beyond the Standard Model
- ▶ a likely mechanism is "massive Majorana neutrino exchange", see e.g. [2]

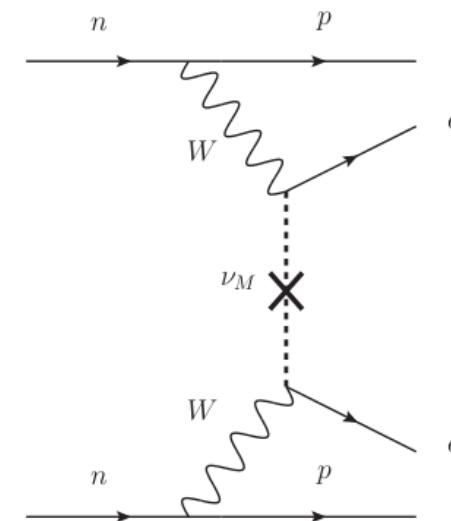

[1] GERDA Collaboration, J. Phys. G: Nucl. Part. Phys. 40 (2013) 035110

[2] W. Rodejohann, Int. J. Mod. Phys. E20, 1833-1930 (2011)

The GERDA Experiment (Phase I)

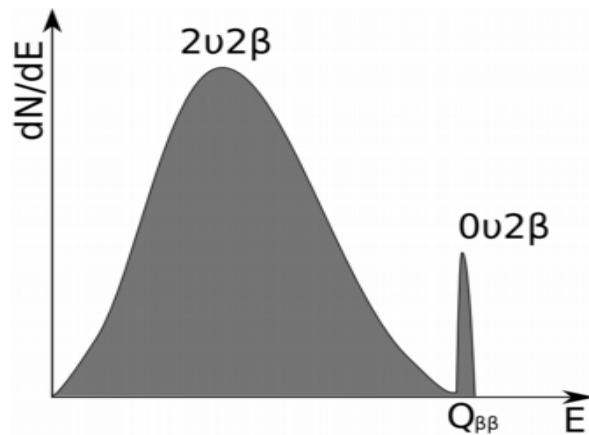

Experimental setup:

- ▶ bare Ge diodes enriched to 86 % of ^{76}Ge :
 - ▶ directly immersed in a 5.5 m high 64 m^3 liquid Ar cryostat: cooling and shielding
- ▶ water Cherenkov detector (590 m^3 , 8.5 m height), veto muons, absorb neutrons, γ rays
- ▶ plastic scintillator to veto muons going through the cryostat neck

Experimental signature:

- ▶ peak at $Q_{\beta\beta} = m(A, Z) - m(A, Z - 2)$
 $= 2039 \text{ keV}$ for ^{76}Ge



Mockup of the GERDA experiment
[GERDA Collab., Eur. Phys. J. C 73 (2013) 2330]

Sensitivity and Timeline

Sensitivity:

$$\begin{aligned} \blacktriangleright T_{1/2}^{0\nu}(n_\sigma) &= \frac{\ln 2 \cdot N_A}{n_\sigma \sqrt{2}} \frac{f_{76} \cdot \epsilon}{m_A} \sqrt{\frac{M \cdot t}{BI \cdot \Delta E}} \\ &= \text{const.} \sqrt{\frac{M \cdot t}{BI \cdot \Delta E}} \end{aligned}$$

M = detector mass

t = livetime

BI = background index

ΔE = energy resolution,
excellent in Ge

$\blacktriangleright \Rightarrow$ background reduction
directly increases the sensitivity

Phase I background reduction

- \blacktriangleright careful material selection
- \blacktriangleright cut detector coincidences
- \blacktriangleright block ^{42}K ions from drifting to the detectors using minishrouds
- \blacktriangleright use pulse shape discrimination

Timeline:

- \blacktriangleright March 2008: cryostat installation
- \blacktriangleright May 2010: start of commissioning
- \blacktriangleright Nov 2011 – May 2013: Phase I
- \blacktriangleright currently: Phase II upgrade

Two Phases:	Mass [kg]	BI [cts/(keV·kg·yr)]	Exposure [kg·yr]	$T_{1/2}^{0\nu}$ Sensitivity [yr]
I (finished)	18	10^{-2}	21.6	$2 \cdot 10^{25}$
II (expected)	35	10^{-3}	100	$1.4 \cdot 10^{26}$

Background Sources

α decays on the p+ surface

- ▶ have specific pulse shapes
- ▶ the outer n+ electrode of the detectors is not active => does not see α events

β decay of ^{42}K (from ^{42}Ar) on the surface or close to the detector


- ▶ can penetrate the n+ electrode
- ▶ have specific pulse shape, some deposit energy in LAr

β decay of ^{60}Co inside the detectors


- ▶ in coincidence with γ => multi site event (MSE)

γ rays from ^{208}Tl , ^{214}Bi from various set-up components

- ▶ large fraction of multi site events

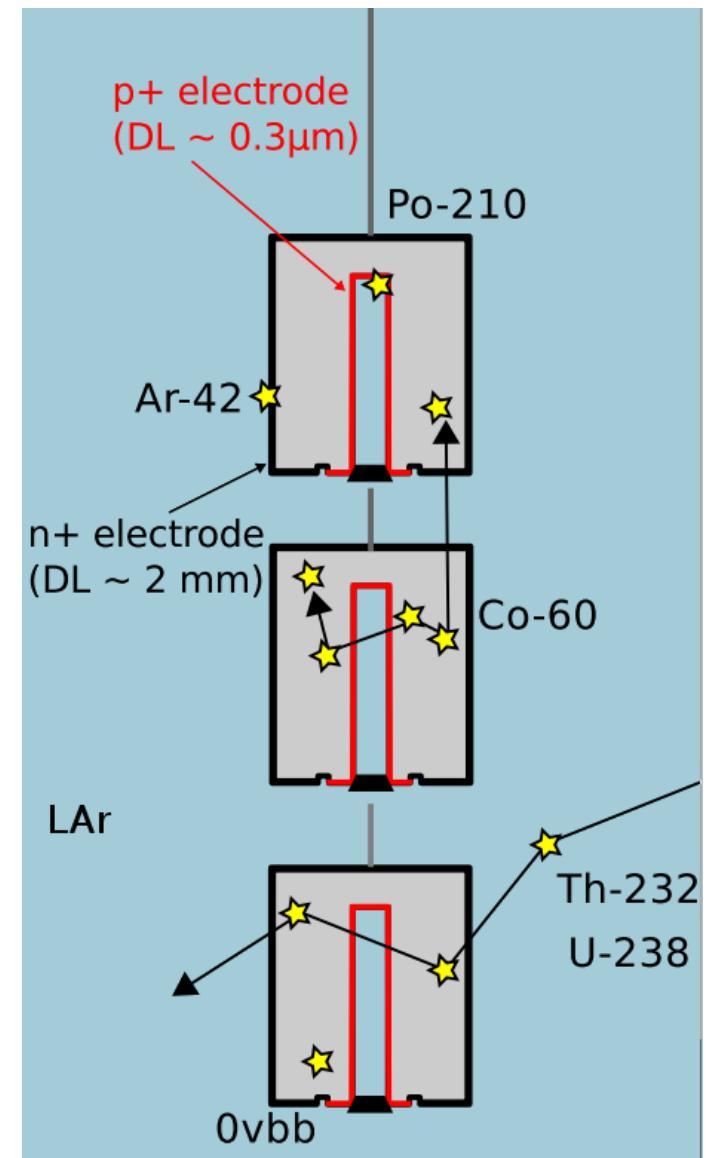

Phase I Background & Datasets

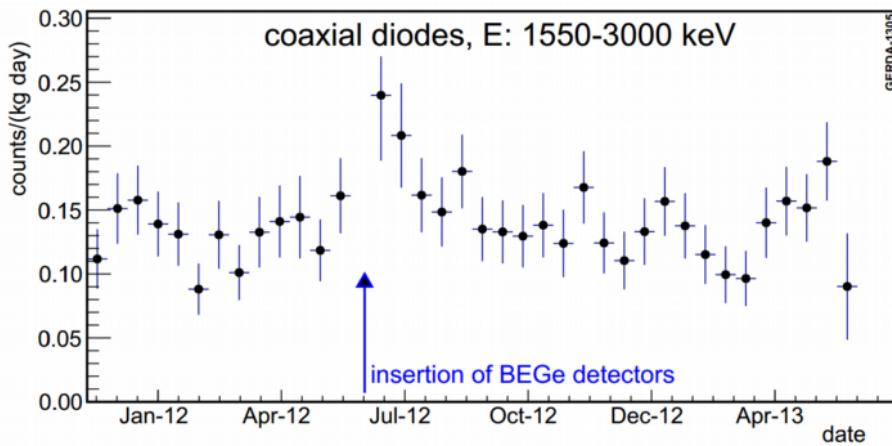


Increased background after removal of two nat-coaxial and insertion of BEGe's:

- ▶ Silver: enriched coax data taken in June and July 2012
- ▶ Gold: all other enriched coax data
- ▶ BEGe data kept separately, due to different energy resolution and background
- ▶ natural detectors

dataset	exposure [kg·yr]
Golden	17.90
Silver	1.30
BEGe	2.40


data taken with blinded ROI

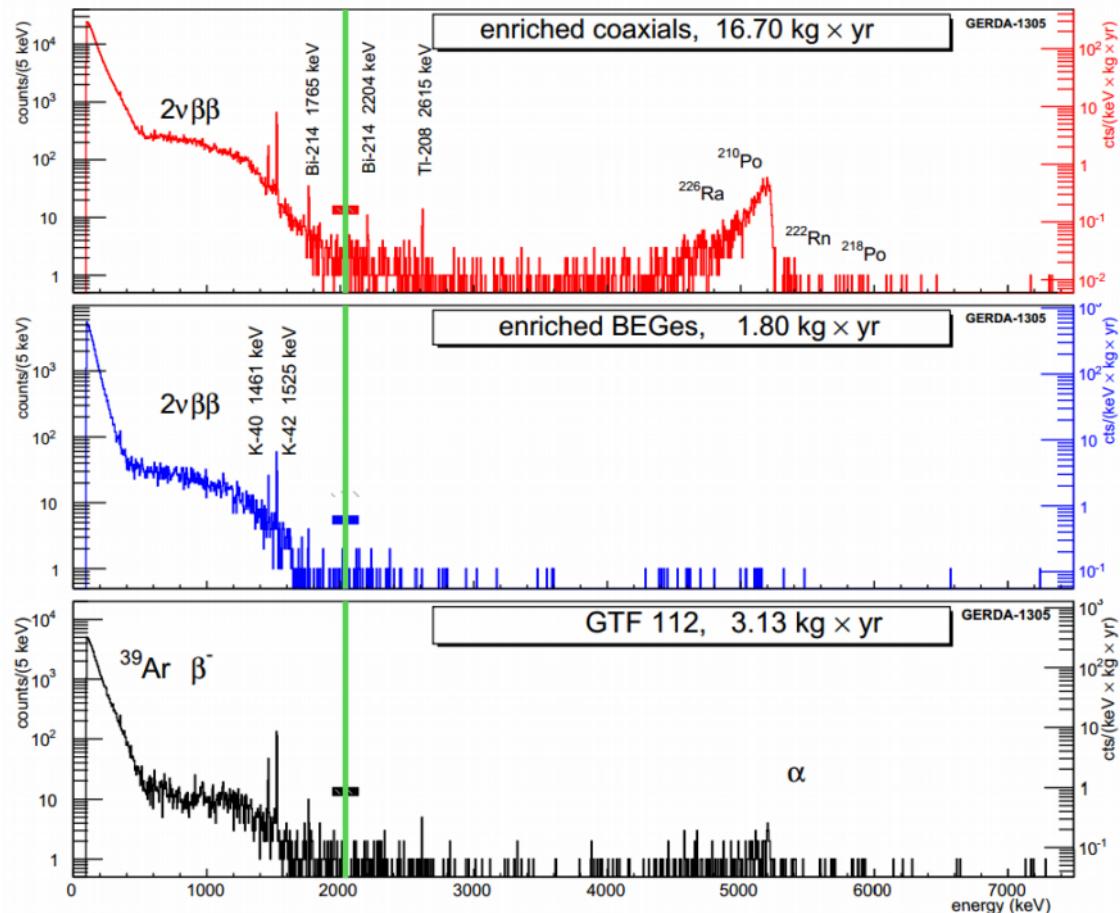

GERDA Phase I Background at $Q_{\beta\beta}$

Background Models:

- ▶ minimum model containing only known and visible background sources
- ▶ alternative (maximum model) containing the same isotopes but more possible locations
- ▶ both models predict a flat background at $Q_{\beta\beta}$

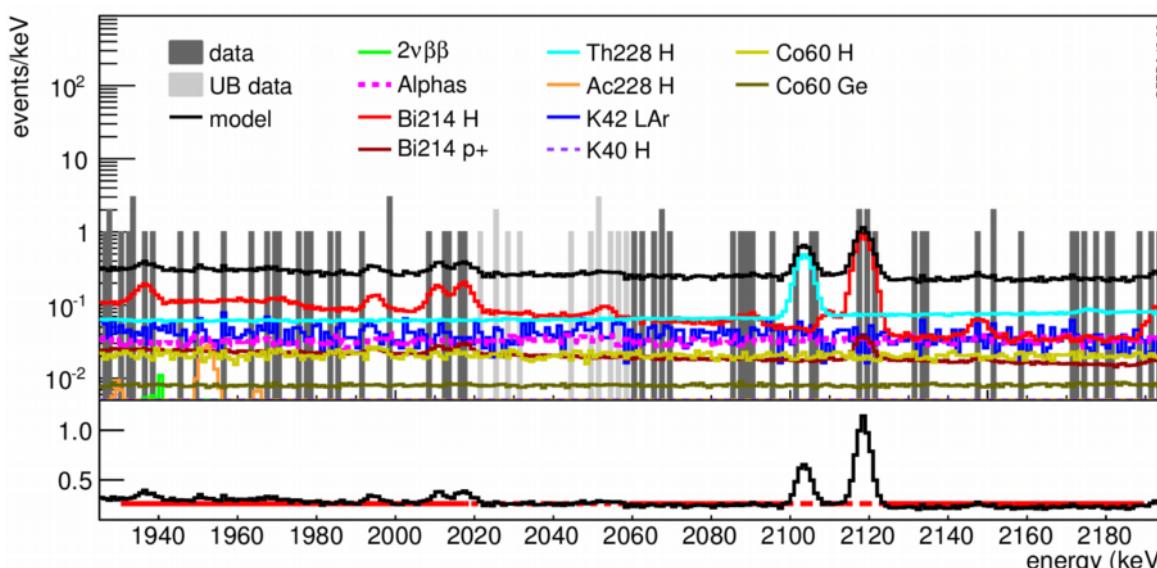


$[10^{-3} \text{ cts}/(\text{keV} \cdot \text{kg} \cdot \text{yr})]$	GOLD-coax	SUM-BEGe
interpolation	17.5[15.1, 20.1]	36.1[26.4, 49.3]
minimum	18.5[17.6, 19.3]	38.1[37.5, 38.7]
maximum	21.9[20.7, 23.8]	-
after PSD	11[9, 13]	5[2, 9]

For $0\nu 2\beta$ analysis:

- ▶ use an interpolation of the background by a constant excluding known γ peaks at 2104 (^{208}TI SEP) and 2119 keV (^{214}Bi). Value is consistent with model predictions
- ▶ table:
BI before and after Pulse Shape Discrimination (PSD) in ROI

Phase I Results

PSD	Dataset	Obs.	Exp. bkg
no	golden	5	3.3
	silver	1	0.8
	BEGe	1	1.0
yes	golden	2	2.0
	silver	1	0.4
	BEGe	0	0.1

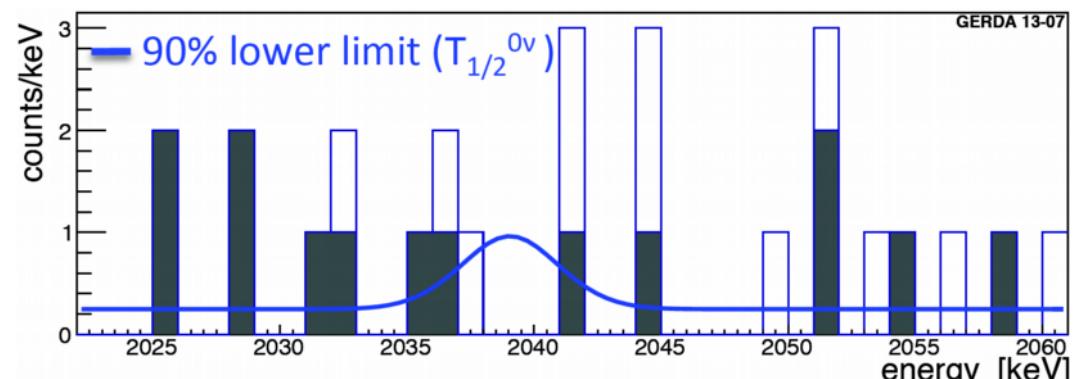

Empty: rejected by PSD
Filled: accepted by PSD

Profile Likelihood Method

- ▶ best fit $N_{0\nu} = 0$
- ▶ no excess over background
- ▶ 90% C.L. lower limit:

$$T_{1/2}^{0\nu} > 2.1 \cdot 10^{25} \text{ yr}$$

Bayesian Approach

- ▶ flat prior for $1/T_{1/2}$ in $[0; 10^{-24}] \text{ yr}^{-1}$
- ▶ best fit $N_{0\nu} = 0$
- ▶ 90% credibility interval:
- ▶ $T_{0\nu} > 1.9 \cdot 10^{25} \text{ yr}$

GERDA Collaboration, Phys. Rev. Lett. 111 (2013) 122503

Comparison with other Experiments

Claimed observation of $0\nu2\beta$ decay $T_{0\nu} = 1.19 \cdot 10^{25}$ yr [1]:

- ▶ prediction for GERDA: 5.9 ± 1.4 signal cts over 2.0 ± 0.3 bkg cts in $Q_{\beta\beta} \pm 2\sigma$
- ▶ GERDA observed 3 cts in $Q_{\beta\beta} \pm 2\sigma$, 0 cts in $Q_{\beta\beta} \pm 1\sigma$
⇒ claim disfavoured with 99% probability

Combining with HdM 2001 and IGEX
2002:

- ▶ $T_{1/2} > 3.0 \cdot 10^{25}$ yr (90%) C.L.
- ▶ combined ^{76}Ge limit on effective Majorana neutrino mass:
 $m_{\beta\beta} < 0.2 - 0.4$ eV (depends on nuclear matrix element and phase space factor)

Searches with ^{136}Xe

- ▶ KamLAND-Zen (combined):
 - ▶ $T_{0\nu} > 2.6 \cdot 10^{25}$ yr [2]
 - ▶ $m_{\beta\beta} < 0.14 - 0.28$ eV
- ▶ Exo-200:
 - ▶ $T_{0\nu} > 1.1 \cdot 10^{25}$ yr [3]
 - ▶ $m_{\beta\beta} < 0.19 - 0.45$ eV

[1] Phys. Lett. B 586,198 (2004)

[2] Phys. Rev. C86:021601 (2012)

[3] Nature (2014), doi:10.1038/nature13432

Phase II Upgrades

Additional 20 kg of BEGe detectors

- ▶ total mass ≈ 35 kg
- ▶ enhanced PSD performance
- ▶ factor 1.5 better energy resolution
- ▶ improved preamplifier and contacting
- ▶ radio cleaner holder


Active liquid Ar Veto

- ▶ significant γ background reduction

Low n-flux custom calibration sources

Total background reduction by 1 order of magnitude:



- ▶ 10^{-3} counts/(keV·kg·yr)

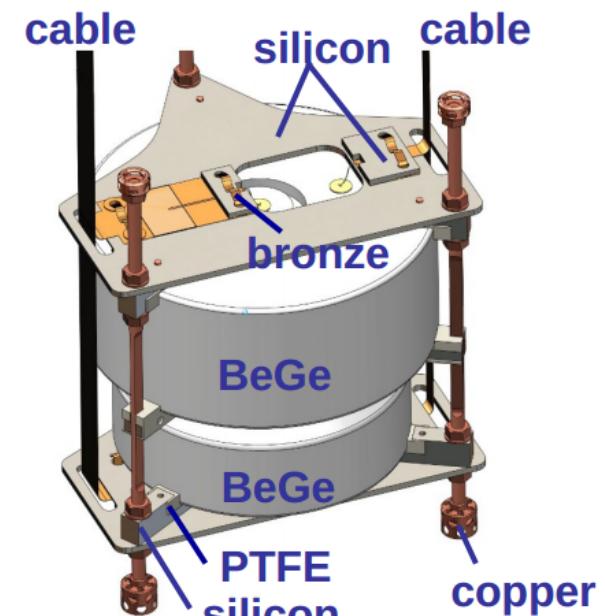

Pulse Shape Discrimination

BEGe and Coaxial geometry result in different el. fields and pulse shapes

- ▶ require different PSD methods

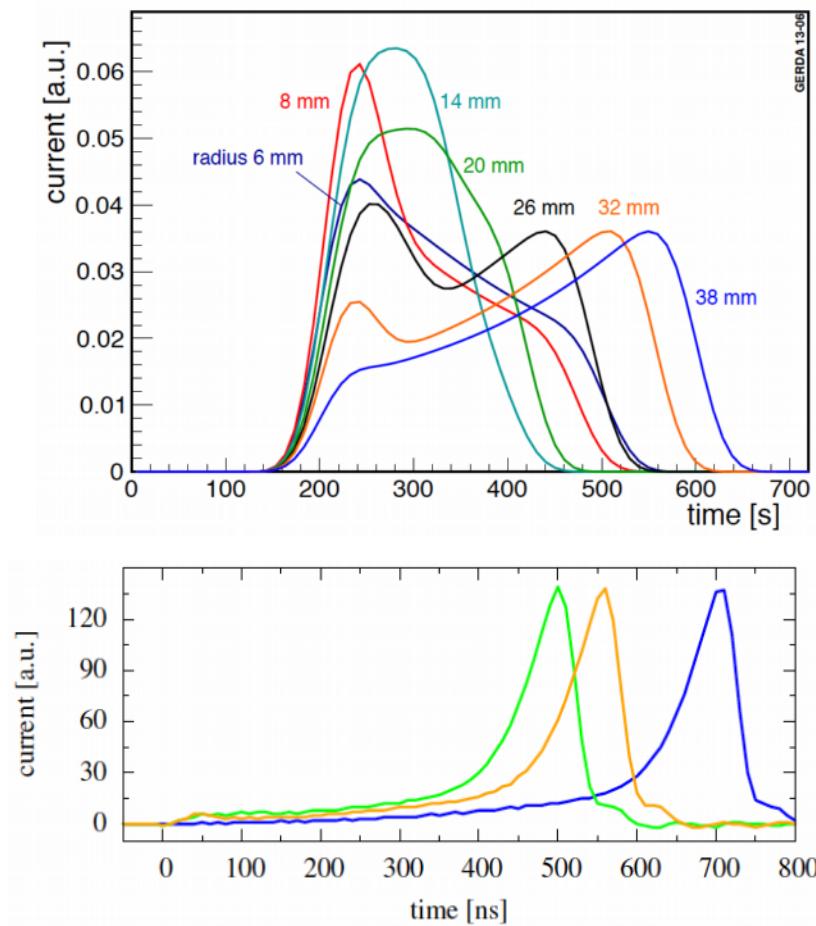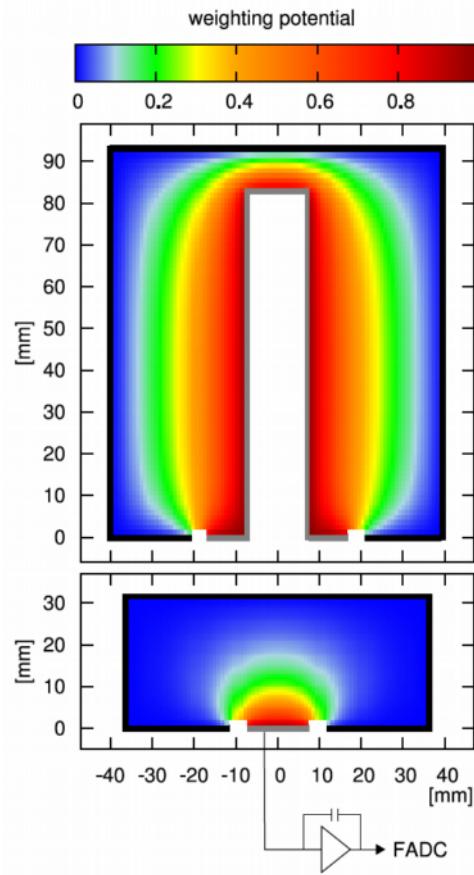

- ▶ simulated SSE current pulse in coaxial detector
- ▶ low PSD capabilities
 - ▶ use Artificial Neural Network
- ▶ simulated SSE current pulse in BEGe
- ▶ high PSD capabilities
 - ▶ cut based method



PSD with BEGe detectors

Signal events:

- ▶ single location in the detector bulk (SSE)

Background:


- ▶ γ : mostly multiple interaction sites (MSE)
- ▶ α and β : mostly surface

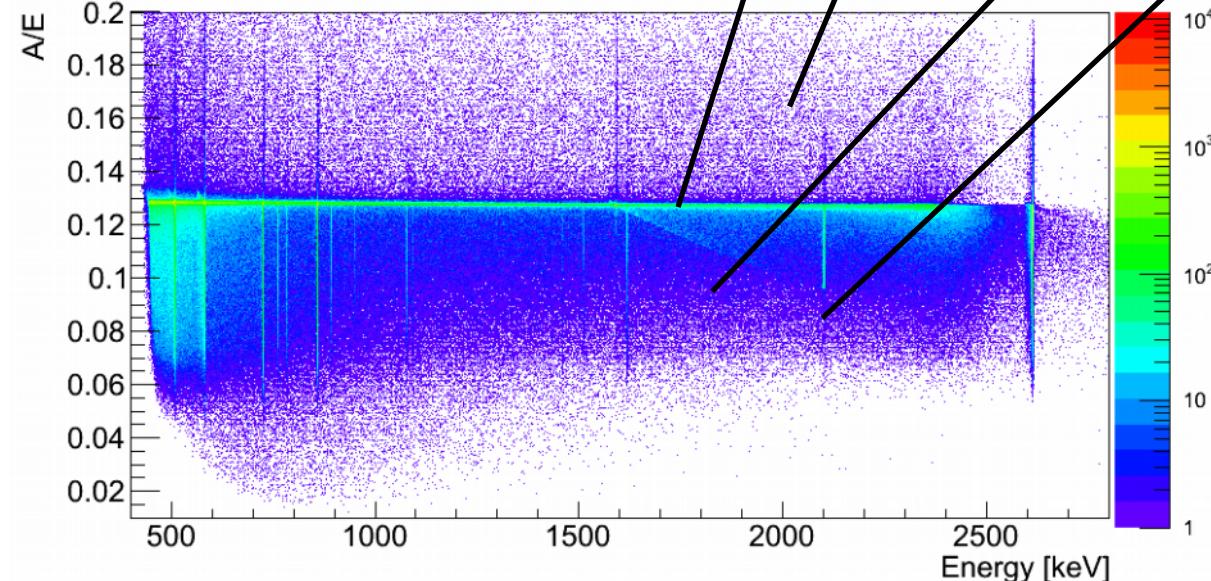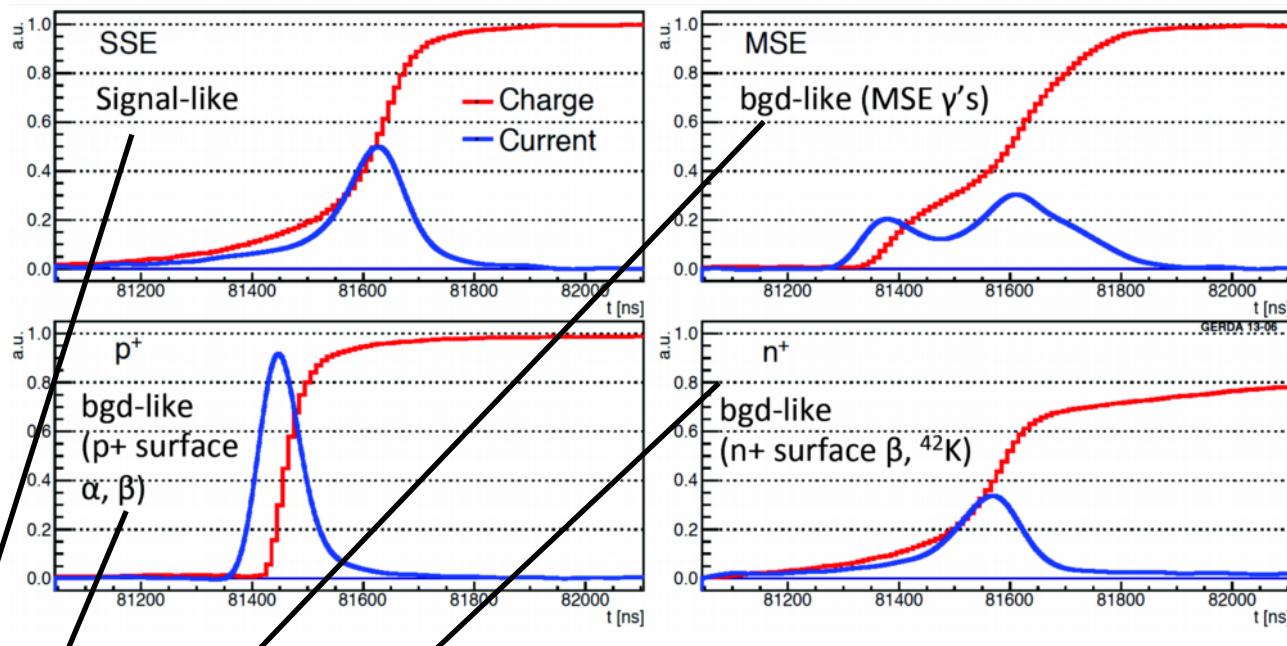

Background rejection:

- ▶ cut on amplitude A of current pulse / energy E (amplitude of charge pulse)
- ▶ efficiency strongly dependent on electronic noise
 - => improve noise reduction for Phase II e.g. using wavelets

Phase II Upgrade: Liquid Ar Veto

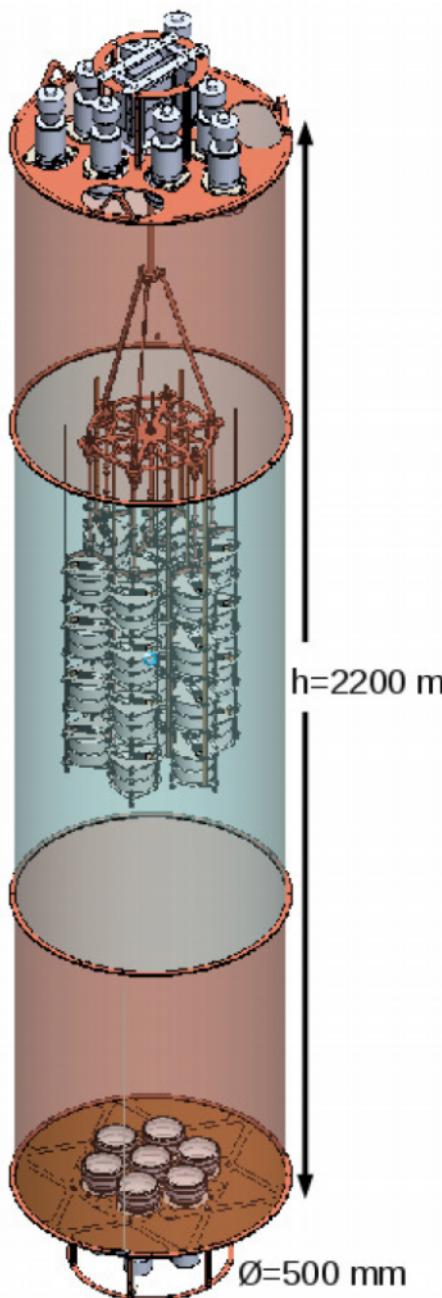

Principle:


- ▶ background events in Ge often in coincidence with a Compton scatter or a second γ in liquid Ar
 - ▶ => produces scintillation of 128 nm
- ▶ VUV light is shifted to blue light and detected by PMTs and SiPMs

Expected suppression factors:

- ▶ ^{60}Co : 27
- ▶ ^{226}Ra chain: 4.6
- ▶ ^{228}Th chain: 1180

Veto setup:

- ▶ each detector string surrounded by transparent nylon
- ▶ top and bottom PMT array
- ▶ central fibre cylinder

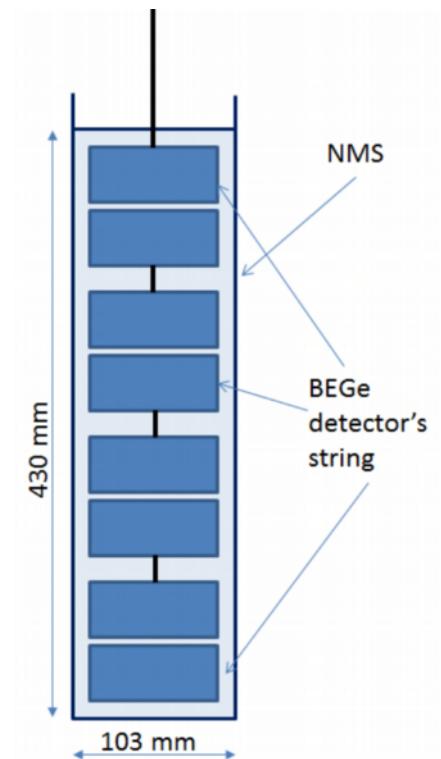

Liquid Ar Veto

Top and bottom array:

- ▶ 3" R11065-20 mod PMTs
 - ▶ 9 top + 7 bottom
- ▶ Cu cylinder lined with Tetratex®
 - ▶ coated with wavelength shifter TPB (Tetraphenyl Butadiene)




Central part:

- ▶ nylon cylinders coated with TPB + PS
- ▶ large cylinder of TPB coated BFC-91A fibres
- ▶ read out by SiPMs

Conclusion and Outlook


Phase I:

- ▶ $T_{0\nu} > 2.1 \cdot 10^{25}$ yr (90% C.L.)
- ▶ combined with HdM 2001 and IGEX 2002:
 - ▶ $T_{0\nu} > 3.0 \cdot 10^{25}$ yr (90%) C.L.
 - ▶ $m_{\beta\beta} < 0.2\text{-}0.4$ eV

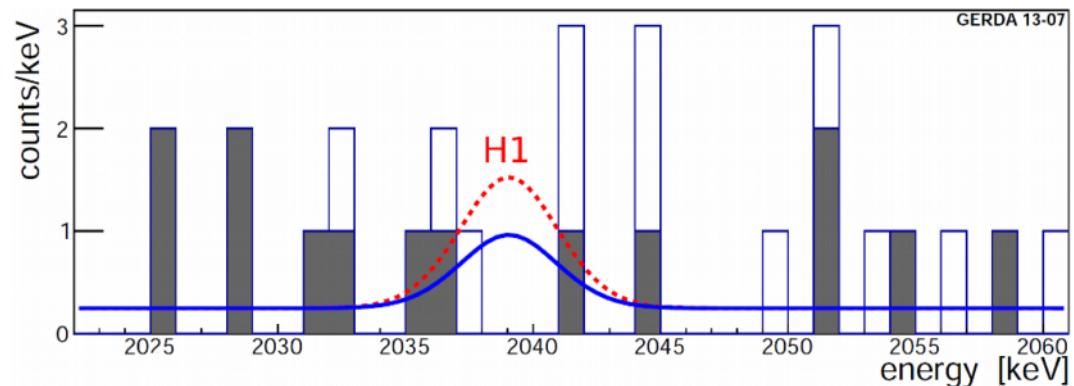


Phase II:

- ▶ 20 kg of additional BEGe detectors
- ▶ liquid Ar veto
- ▶ Exposure goal: 100 kg·yr
- ▶ background rate:
 $1 \cdot 10^{-3}$ cts/(keV·kg·yr)
- ▶ design sensitivity: $T_{0\nu} \approx 2 \cdot 10^{26}$ yr
- ▶ start in 2015

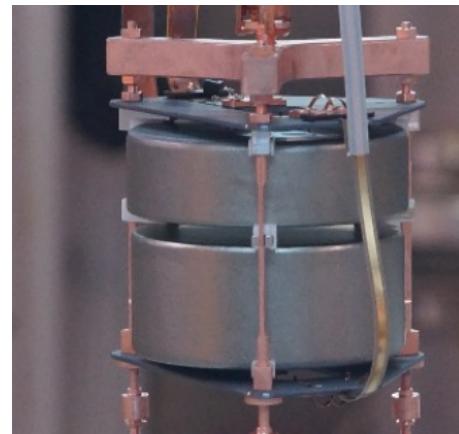

The Gerda Collaboration

<http://www.mpi-hd.mpg.de/gerda/>

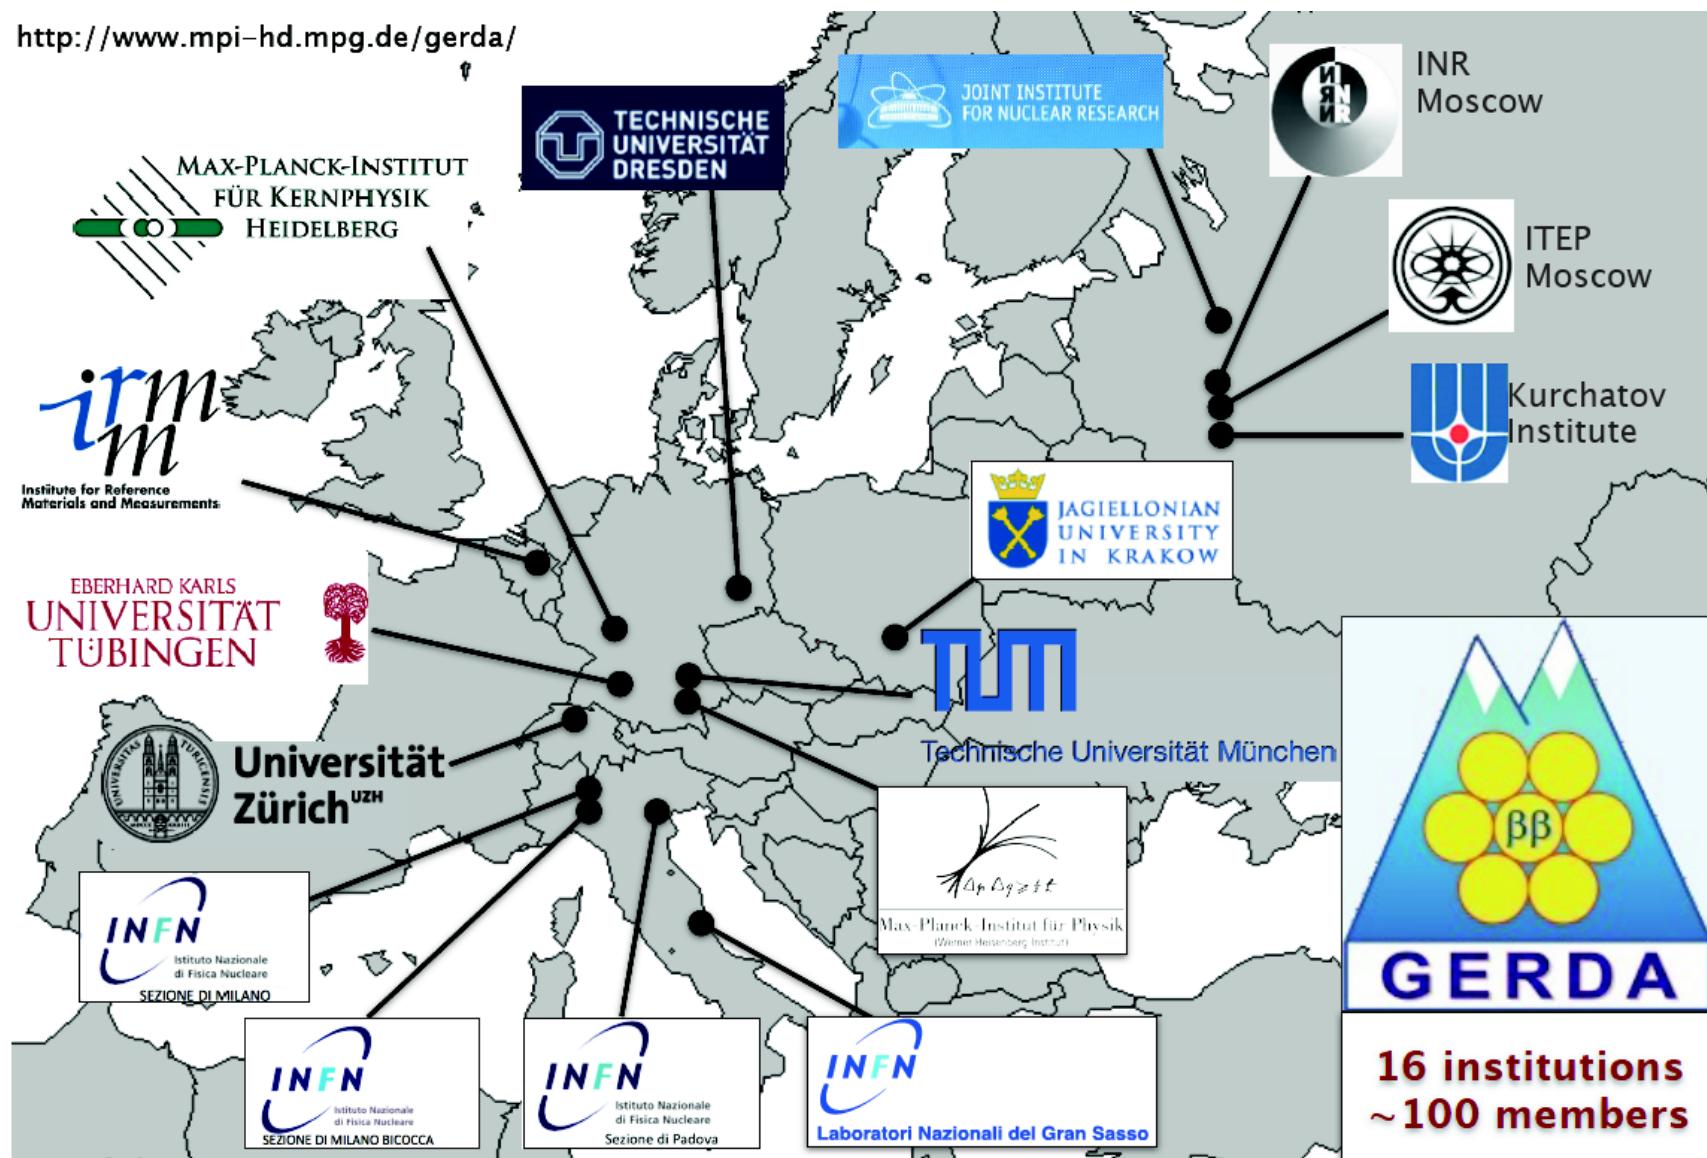

Thank you for your attention!

Backup Slides

Detectors

Coaxial detectors (Phase I)

- ▶ 5 enr-Ge (“ANG”) detectors from Heidelberg-Moscow (HdM), 3 enr-Ge (“RG”) from IGEX, 3 nat-Ge from GeniusTest Facility (GTF)
- ▶ detectors reprocessed at Canberra before being used
- ▶ two detectors turned off because of high leakage current
 - ▶ ⇒ total mass of remaining enriched detectors: 14.6 kg
- ▶ ~2‰ FWHM at 2.6 MeV

BEGe detectors (design for Phase II, BEGe = Broad Energy Germanium)

- ▶ ~1‰ FWHM at 2.6 MeV
- ▶ enhanced Pulse Shape Discrimination (PSD)
- ▶ ~ 20 kg of BEGe’s successfully produced and tested in 2012
- ▶ 5 BEGe’s inserted in GERDA in July 2012
- ▶ one showed instabilities in the energy calibration and was not used

Phase I Data Taking

High average live time fraction.



- ▶ spikes due to calibration.

Total exposure of enriched Ge detectors 21.6 kg yr [1].

Data was taken with a blinded energy window of $Q_{\beta\beta} \pm 20$ keV


(FWHM ≈ 4.5 keV):

- ▶ background models and analysis methods were developed.
- ▶ unblinding of side bands: background models verified and analysis methods frozen.
- ▶ final unblinding performed on 14th of June and the analysis applied.

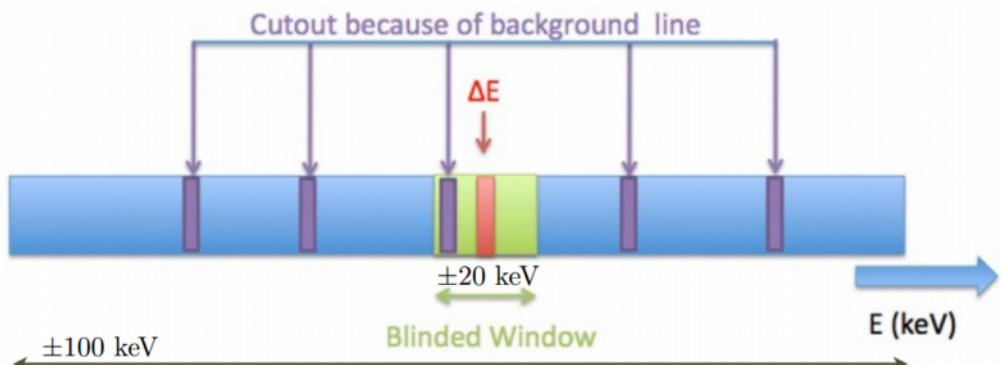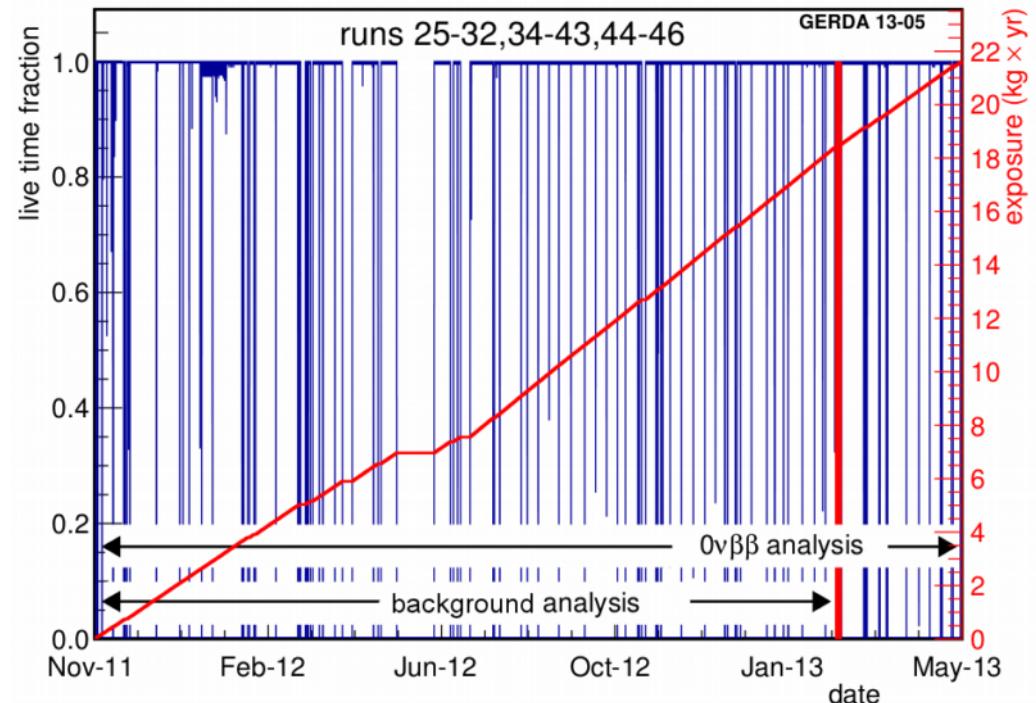

Detector Stability



Calibrate with ≈ 10 peaks
from ^{228}Th source

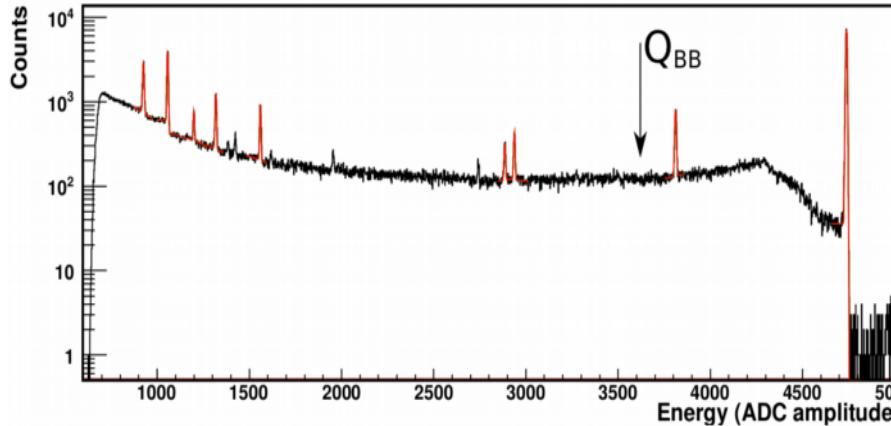


Stable energy calibration:
shift < 2 keV over the full
data taking period.

- as important as the
energy resolution.

Stable energy resolution.

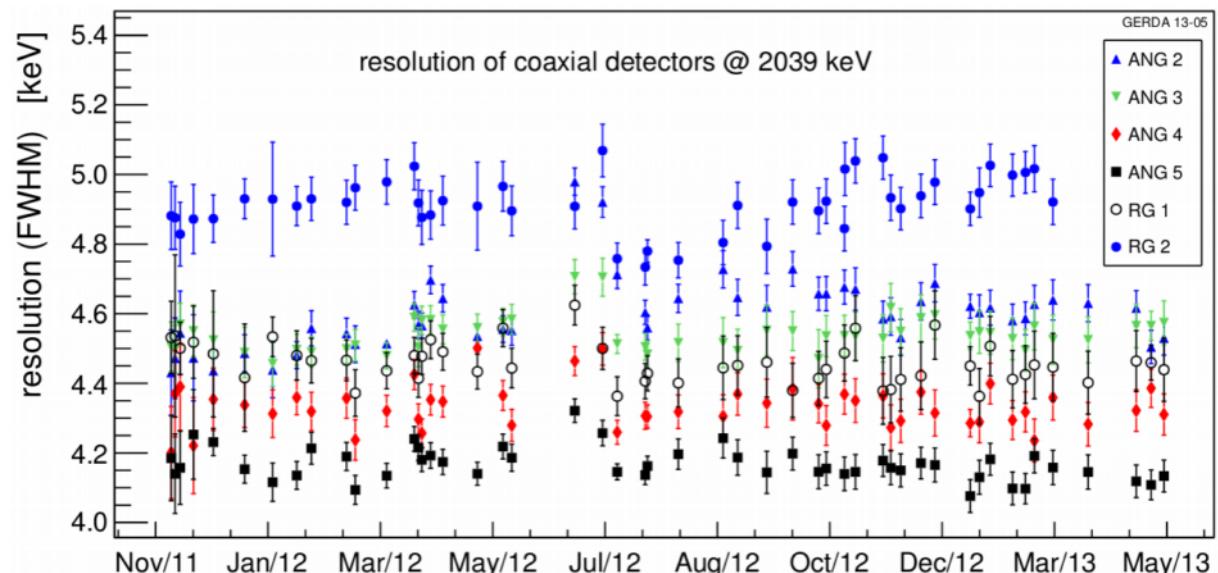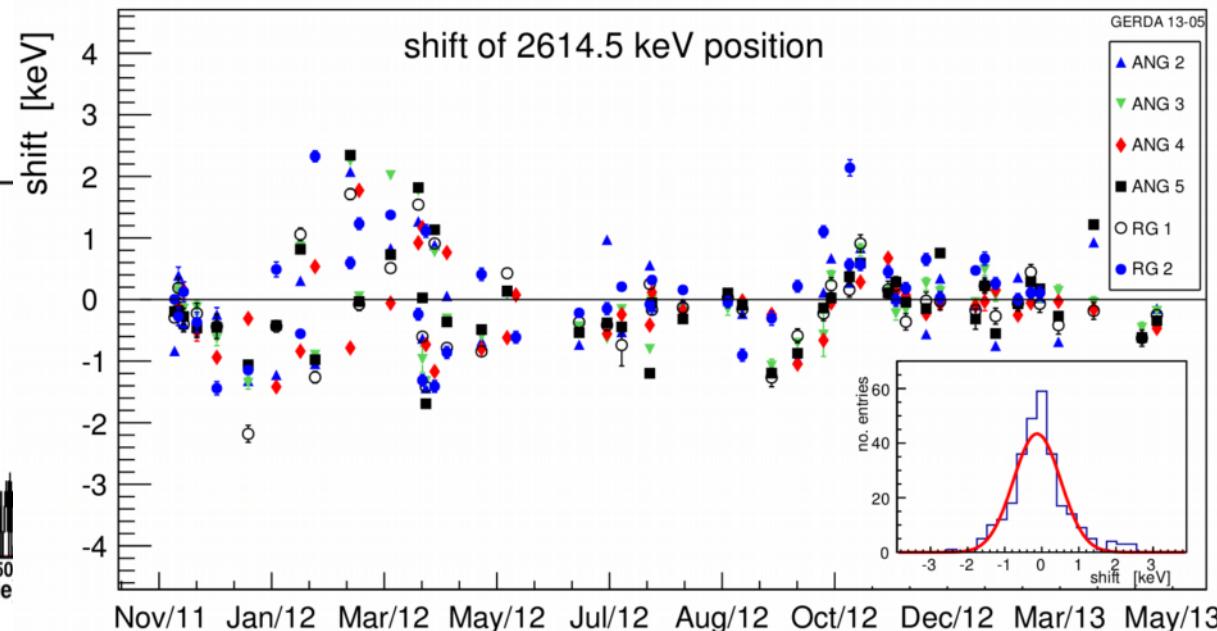

Scanning the Inverse Hierarchy


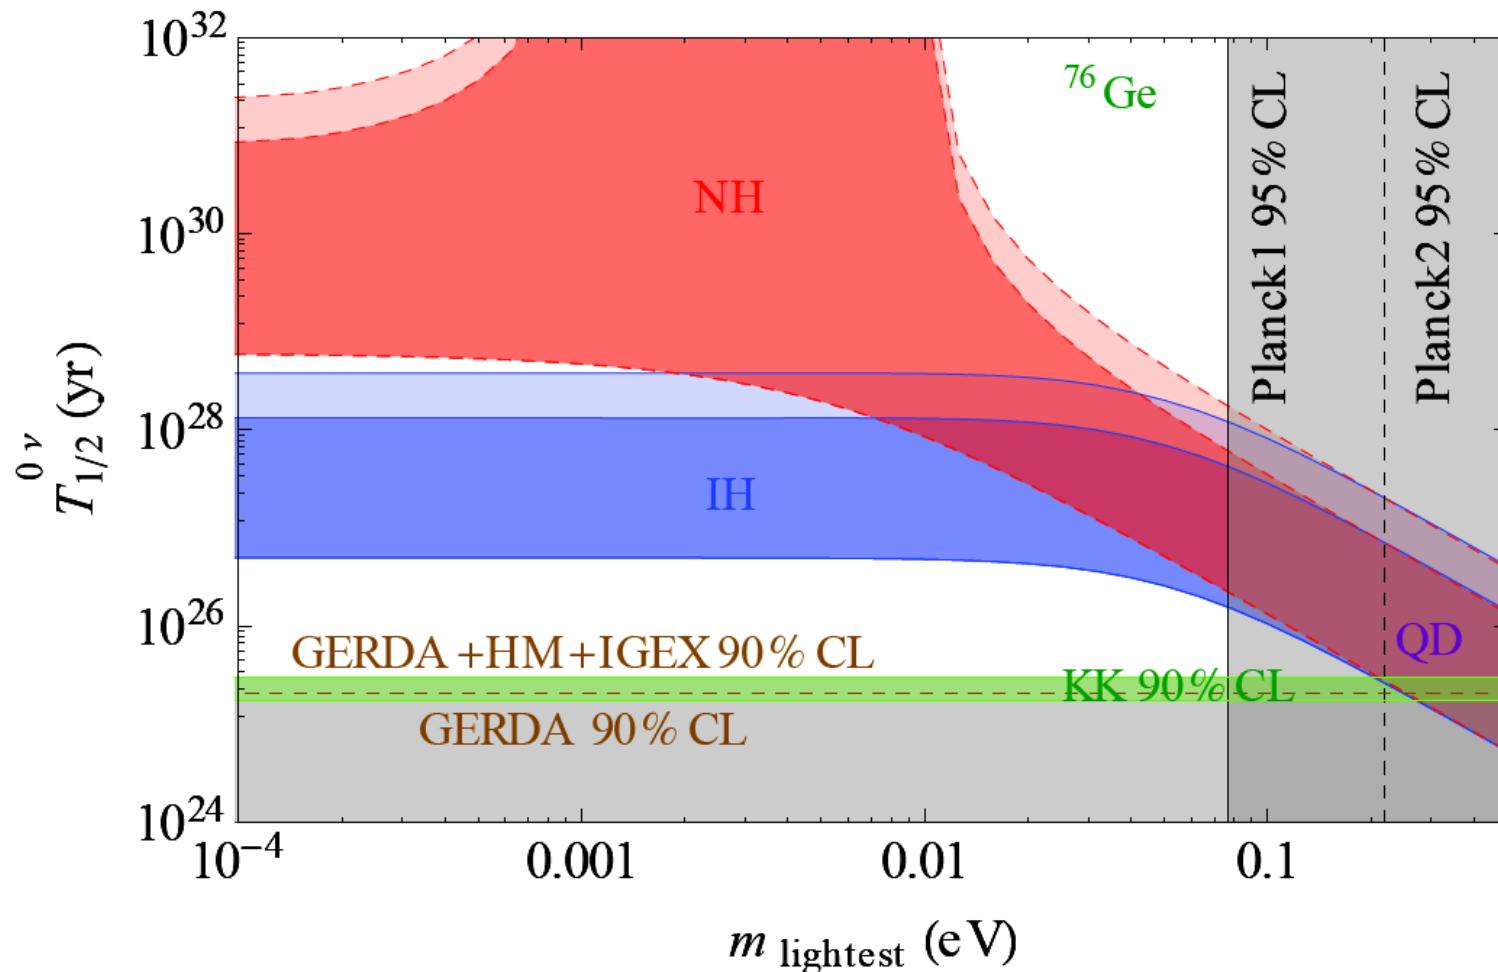


Need to reach a sensitivity of $\sim 10^{28}$ yr on T_{ν_0} in order to test IH [1]

GERDA Phase II will reach $\sim 2 \cdot 10^{26}$ yr


[1] P. S. Bhupal et al., arXiv:1305.0056v2

Minimum Background Model

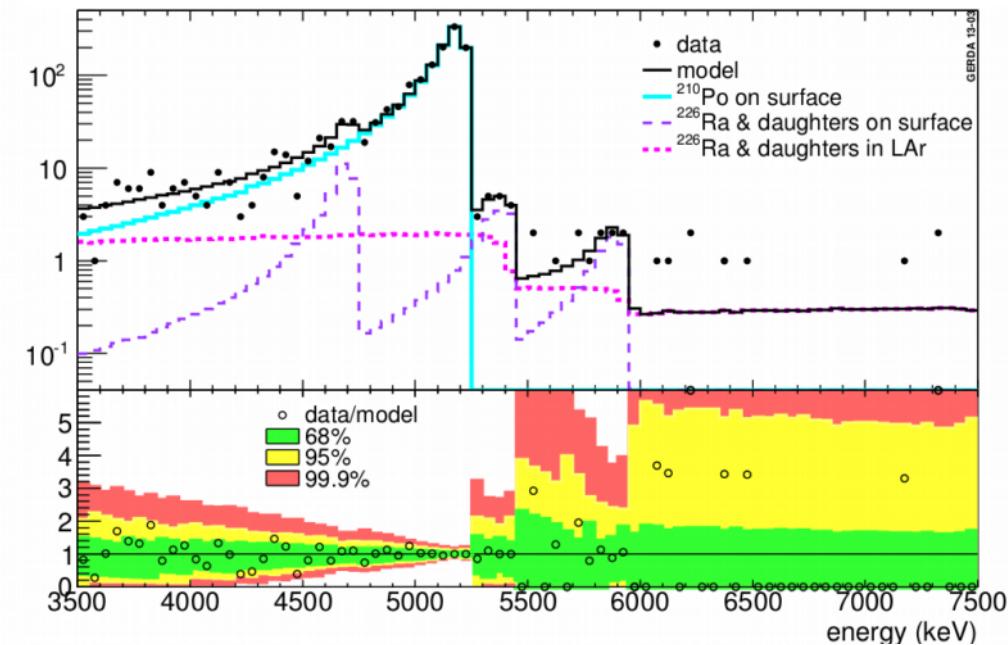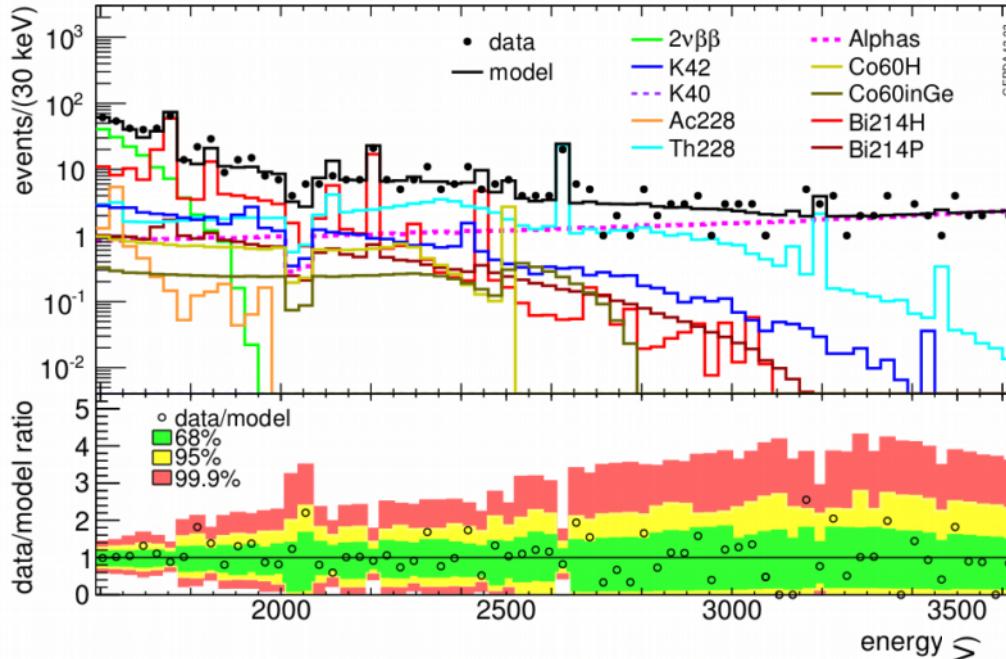


Both background models provide a half life which is consistent with our previously published value of $T_{1/2 \text{ } 2\nu\beta\beta} = 1.84^{+0.14}_{-0.10} \cdot 10^{21} \text{ yr}$ [1].

[1] GERDA collaboration, J. Phys. G:
Nucl. Part. Phys. 40 (2013) 035110

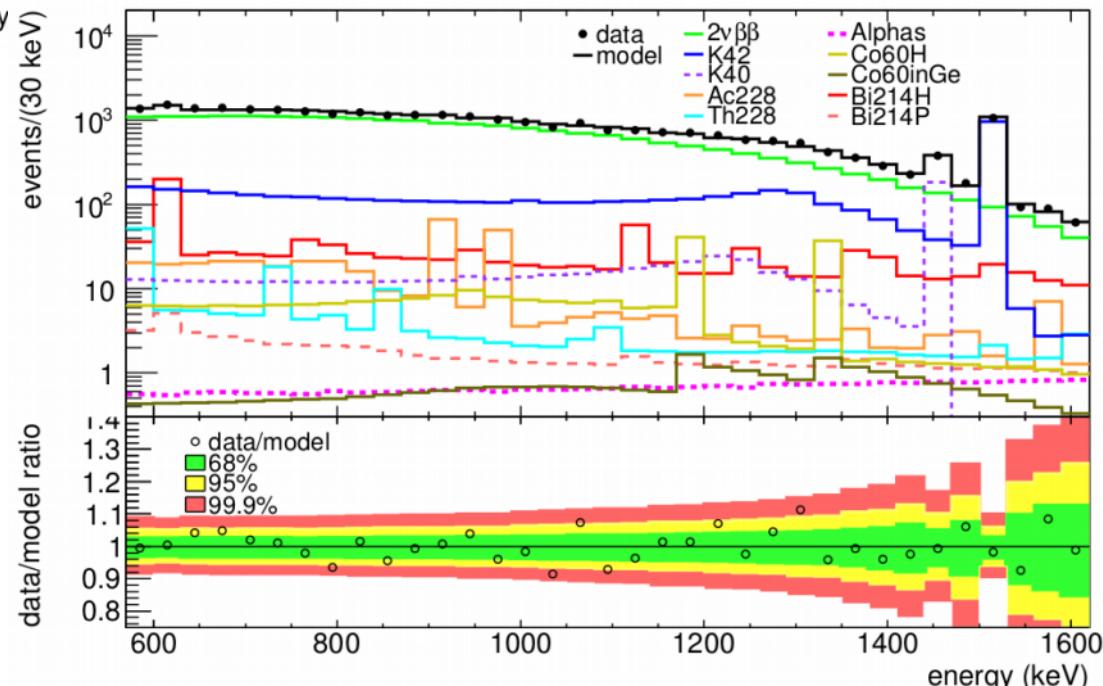


Alpha background & Maximum Model

In the range of 3.5 to 5.3 MeV a decrease of the event rate with time is observed with $T_{1/2} = 138.4 \pm 0.2$ d (statistical uncertainty only), which is compatible with the half life of ^{210}Po of 138.38 d.

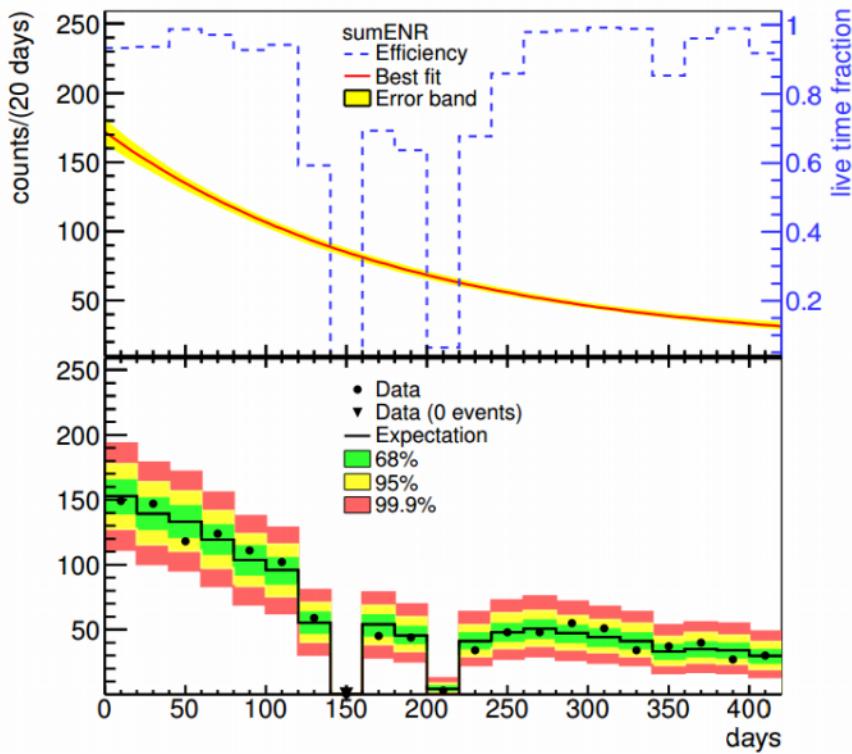

Maximum Model:

- ▶ use same isotopes as for the Minimum Model but more possible source positions to fit the background
- ▶ higher ^{42}K contribution

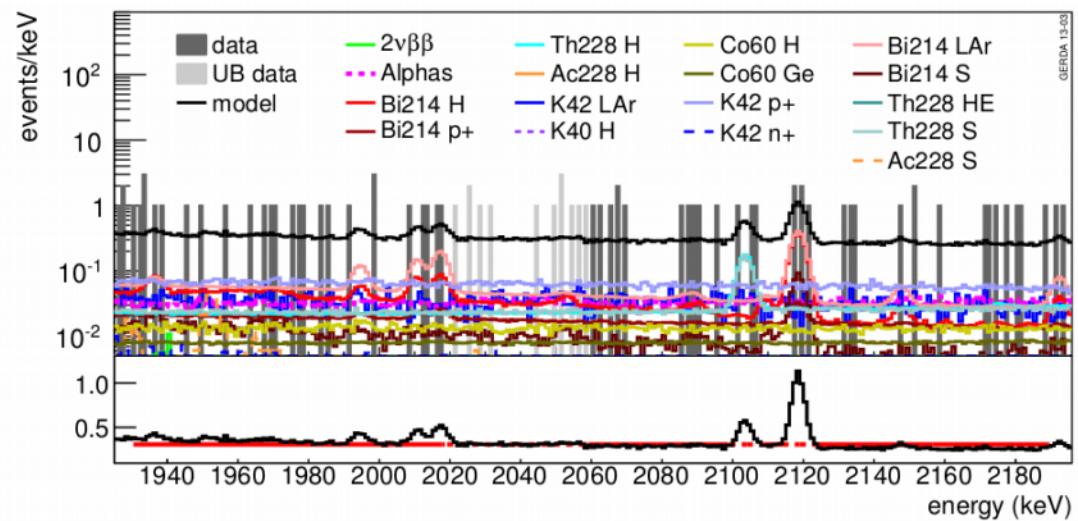


Controversial Claim

Claiming a 4.2σ confidence level of the observation of $0\nu\beta\beta$ in ^{76}Ge .

Extending the energy window increases the background and decreases the signal count by up to 40 %. [2]

2006 limit is not considered:

- ▶ half-life can be reconstructed only with $\epsilon_{\text{PSD}}=1$

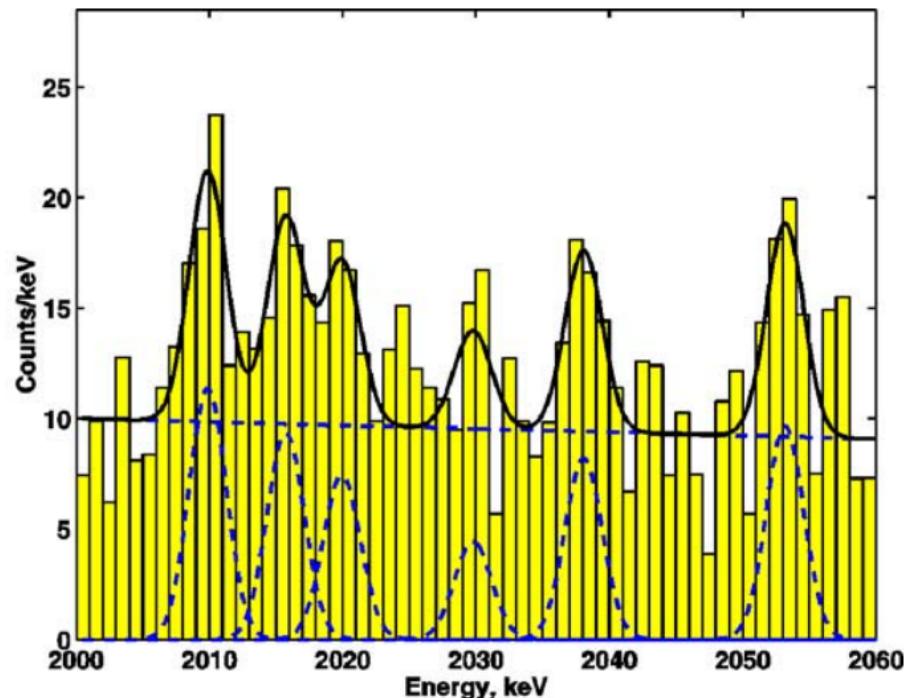

[1] H.V. Klapdor-Kleingrothaus et al.,
Phys. Lett. B586, 198 (2004).

[2] O.Chkvorets, PhD thesis, Universität
Heidelberg, arXiv:0812.1206

Noise Dependency of Rejection Efficiency

Surface event rejection

► high noise

► low noise

