

Search of Neutrinoless Double Beta Decay with the GERDA Experiment

Giovanni Benato for the GERDA Collaboration

University of Zurich


ICHEP 2014
Valencia, 2-9 July 2014



Universität
Zürich UZH


The GERDA Collaboration

<http://www.mpi-hd.mpg.de/gerda/>

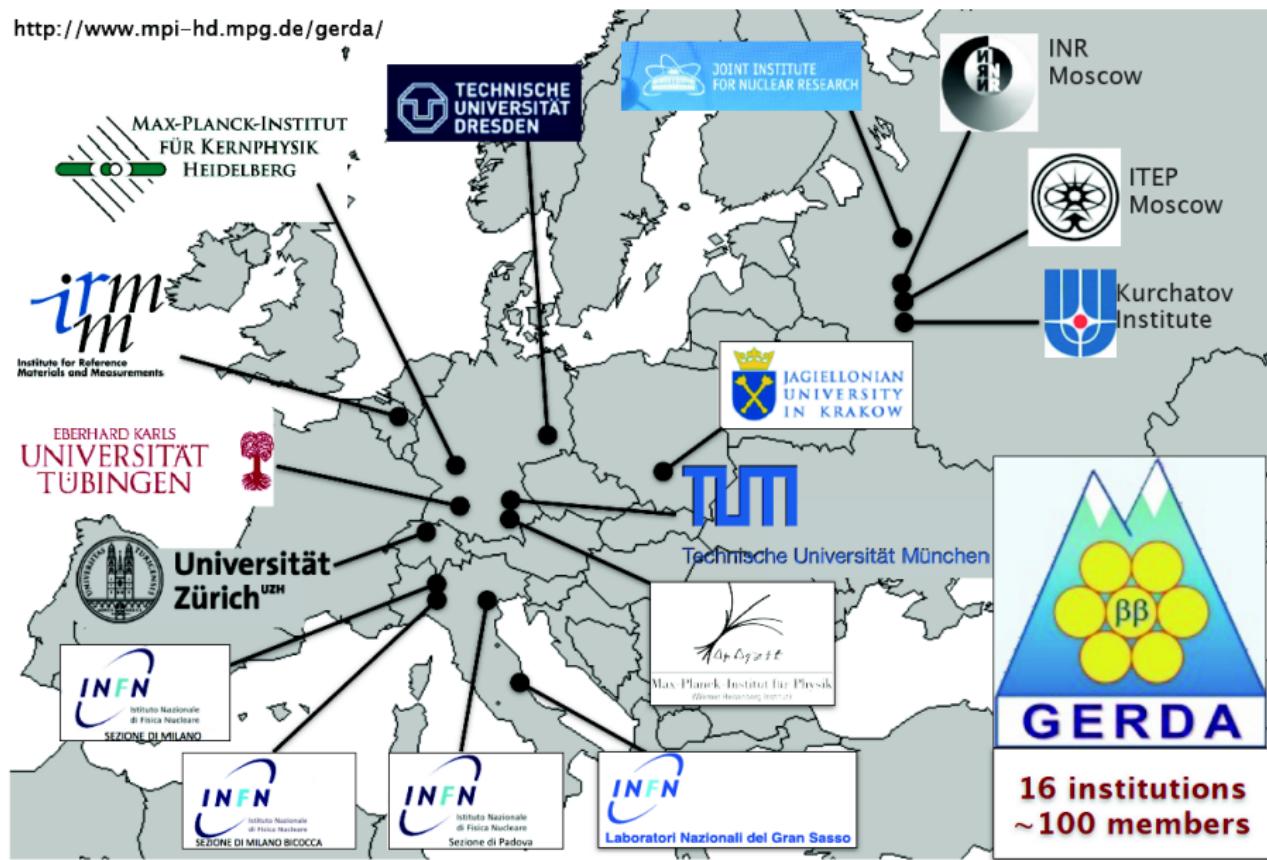

Two neutrino double beta decay ($2\nu\beta\beta$)

- If β -decay energetically forbidden $\rightarrow 2\nu 2\beta$ decay might be possible.
- $2\nu 2\beta$ decay introduced by Maria Goeppert-Mayer in 1935.
- $T_{1/2}^{2\nu}$ usually of order of 10^{19-21} years.
- For ${}^{76}\text{Ge}$: $T_{1/2}^{2\nu} = (1.84^{+0.14}_{-0.10}) \cdot 10^{21} \text{ yr}^*$

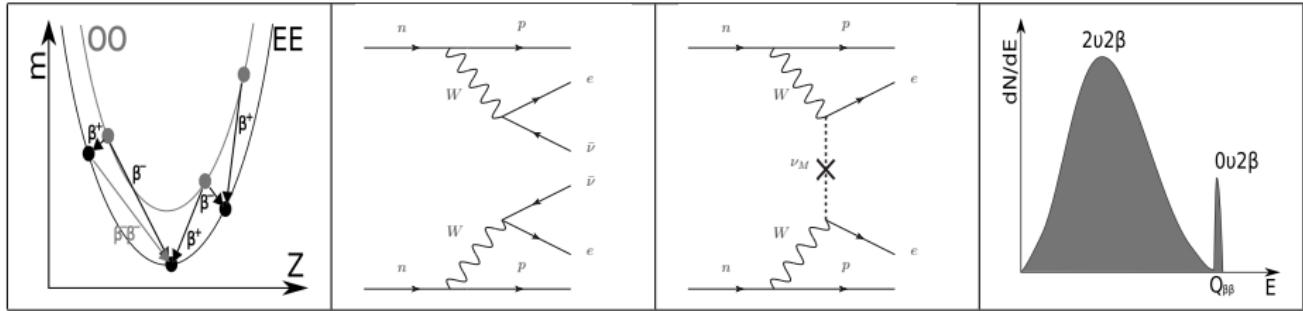

Neutrinoless double beta decay ($0\nu\beta\beta$)

- Violates lepton number conservation ($\Delta L = 2$)
- Possible only if ν 's have Majorana mass component
- Could enlighten the neutrino mass hierarchy

Experimental signatures

- $2\nu\beta\beta$: continuum
- $0\nu\beta\beta$: peak at $Q_{\beta\beta}$ (2039 keV for ${}^{76}\text{Ge}$)

* J. Phys. G: Nucl. Part. Phys. 40 (2013) 035110

Experimental Sensitivity

The mass mechanism

Expected decay rate (for light ν exchange):

$$\left(T_{1/2}^{0\nu}\right)^{-1} = G^{0\nu}(Q, Z) |M^{0\nu}|^2 \langle m_{ee} \rangle^2$$

where:

- ▶ $G^{0\nu}(Q, Z)$ = Phase Space integral
- ▶ $|M^{0\nu}|^2$ = nuclear matrix element
- ▶ $\langle m_{ee} \rangle^2 = \sum_i U_{ei}^2 m_i$ = effective ν mass
- ▶ U_{ei} = elements of the PMNS mixing matrix




Space for competing technologies!

Sensitivity on $T_{1/2}^{0\nu}$ for exclusion limit at n_σ CL with non null background is given by:

$$T_{1/2}^{0\nu}(n_\sigma) = \frac{\ln 2 \cdot N_A}{n_\sigma \sqrt{2}} \frac{f \cdot \varepsilon}{m_A} \sqrt{\frac{M \cdot t}{BI \cdot \Delta E}}$$

where:

 f = enrichment fraction N_A = Avogadro number m_A = atomic mass ε = total efficiency M = detector mass t = livetime $M \cdot t$ = exposure BI = Background Index ΔE = energy resolution

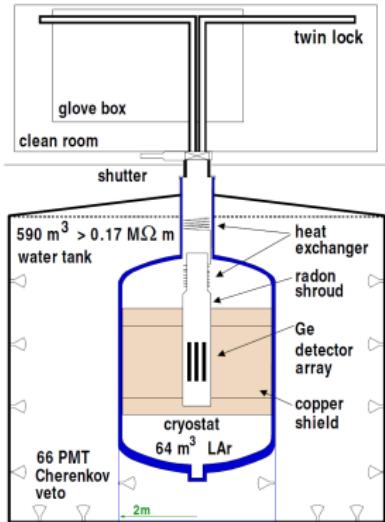

- ▶ Located in Hall A at Laboratori Nazionali del Gran Sasso of INFN
- ▶ 3800 mwe overburden
- ▶ Array of bare Ge detectors 86% enriched in ⁷⁶Ge directly inserted in liquid argon (LAr)
- ▶ Minimal amount of material in proximity of the diodes





Experiment structure


- ▶ 590 m³ Water Tank as shielding and veto for cosmic muons (PMTs)
- ▶ 64 m³ Liquid Argon (LAr) for cooling and shielding (and vetoing)
- ▶ Plastic scintillators above the cryostat to further veto cosmic muons

Ge detector readout

- ▶ Ge diode in reverse bias
→ measurement of ionization energy
- ▶ FADC allows offline analysis of recorded signals

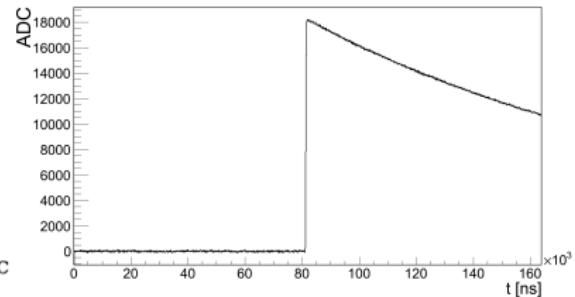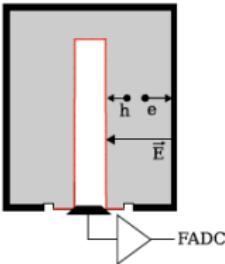

Data processing framework: GELATIO

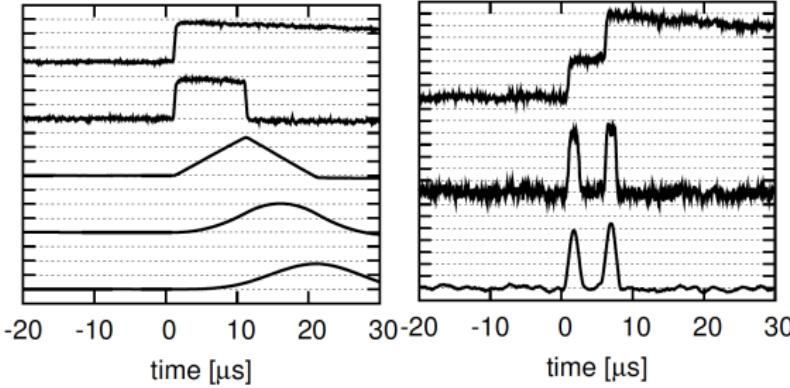

- ▶ Digital signal processing to extract energy, rise time, pulse shape discrimination (PSD) parameters, ...
- ▶ Eur. Phys. J. C (2013) 73:2330
- ▶ JINST 6 (2011) P08013
- ▶ J. Phys., Conf. Ser. 368 (2012) 012047

The two phases of GERDA


	Mass [kg]	Bl [counts/(keV·kg·yr)]	Livetime [yr]	Expected $T_{1/2}^{0\nu}$ Sensitivity [yr]
Phase I	15	10^{-2}	1	$2.4 \cdot 10^{25}$
Phase II	35	10^{-3}	3	$1.4 \cdot 10^{26}$

Coaxial detectors

- ▶ Inherited from HdM and IGEX experiments
- ▶ 2.4% FWHM at $Q_{\beta\beta}$ (1.7% reachable with better cables & shaping)
- ▶ Total enriched mass: 17.7 kg (14.6 kg used for analysis)


BEGe detectors (design for Phase II)

- ▶ BEGe = Broad Energy Germanium
- ▶ 1.6% FWHM at $Q_{\beta\beta}$ (1.2% reachable)
- ▶ ~ 20 kg of BEGe's produced and tested in 2012
- ▶ 5 BEGe's inserted in GERDA in July 2012

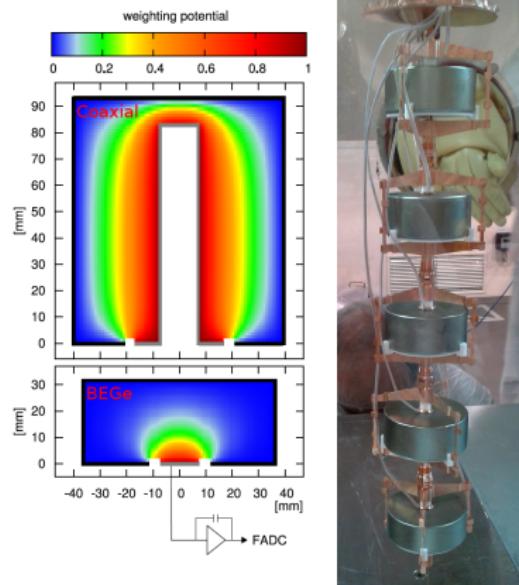



Time Stability and Energy Resolution


FWHM at $Q_{\beta\beta}$

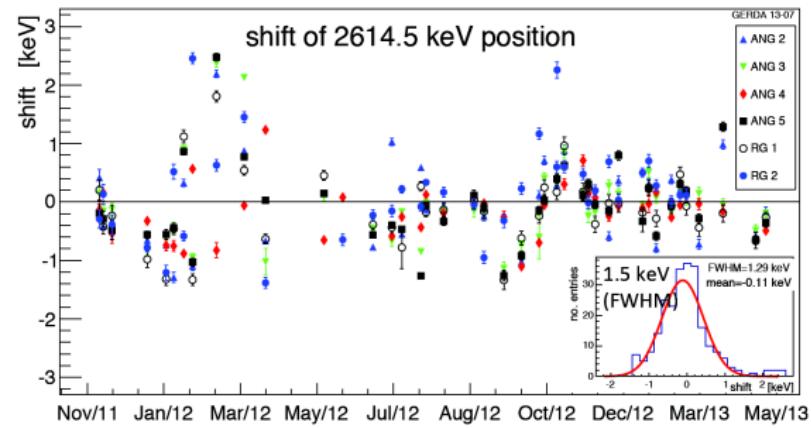

detector	FWHM [keV]
SUM-coax	
ANG2	5.8 (3)
ANG3	4.5 (1)
ANG4	4.9 (3)
ANG5	4.2 (1)
RG1	4.5 (3)
RG2	4.9 (3)
mean coax	4.8 (2)
SUM-BEGe	
GD32B	2.6 (1)
GD32C	2.6 (1)
GD32D	3.7 (5)
GD35B	4.0 (1)
mean BEGe	3.2(2)

FWHM at ^{42}K peak

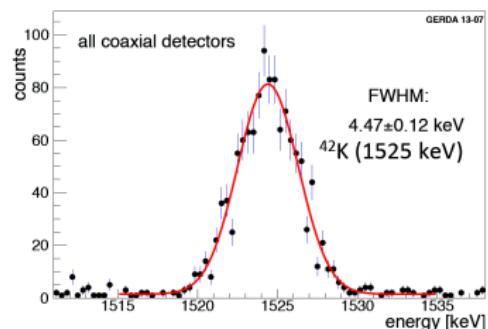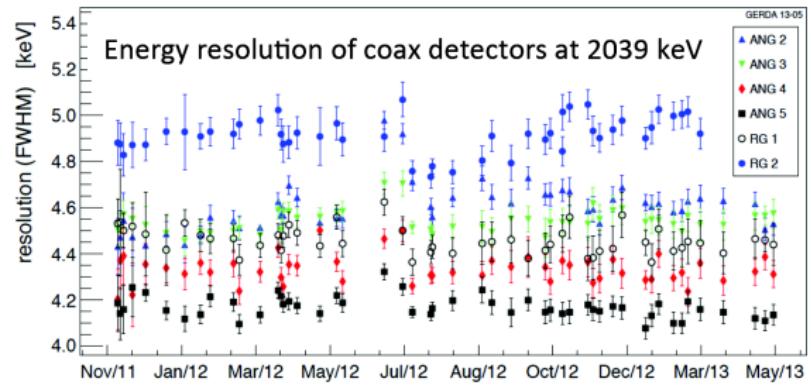


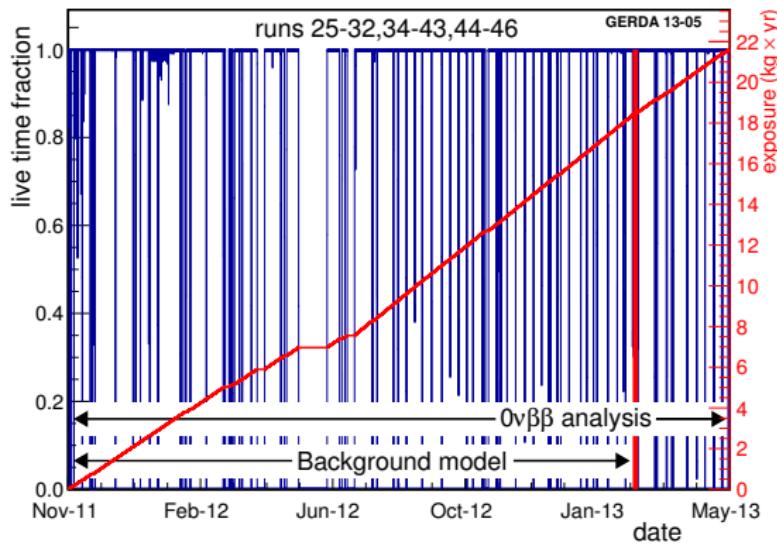

- ▶ Spikes: calibration runs
- ▶ Flat parts: BEGe's insertion (June 2012), maintenance
- ▶ Total livetime: 492.3 days
- ▶ Exposure: 21.6 kg·yr
- ▶ Used 6 coaxial (14.6 kg) and 4 BEGe (3.0 kg)


Blind analysis and unblinding procedure

- ▶ 40 keV blind region around $Q_{\beta\beta}$
- ▶ Background model published before unblinding (EPJC 74 (2014) 2764)
- ▶ Fixed data processing procedure, quality cuts, PSD methods and statistical analysis

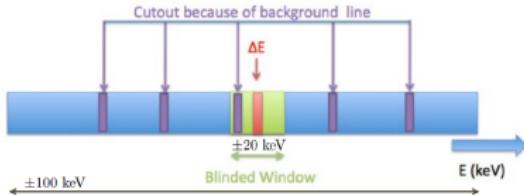

The Background of GERDA Phase I

The Background of GERDA Phase I

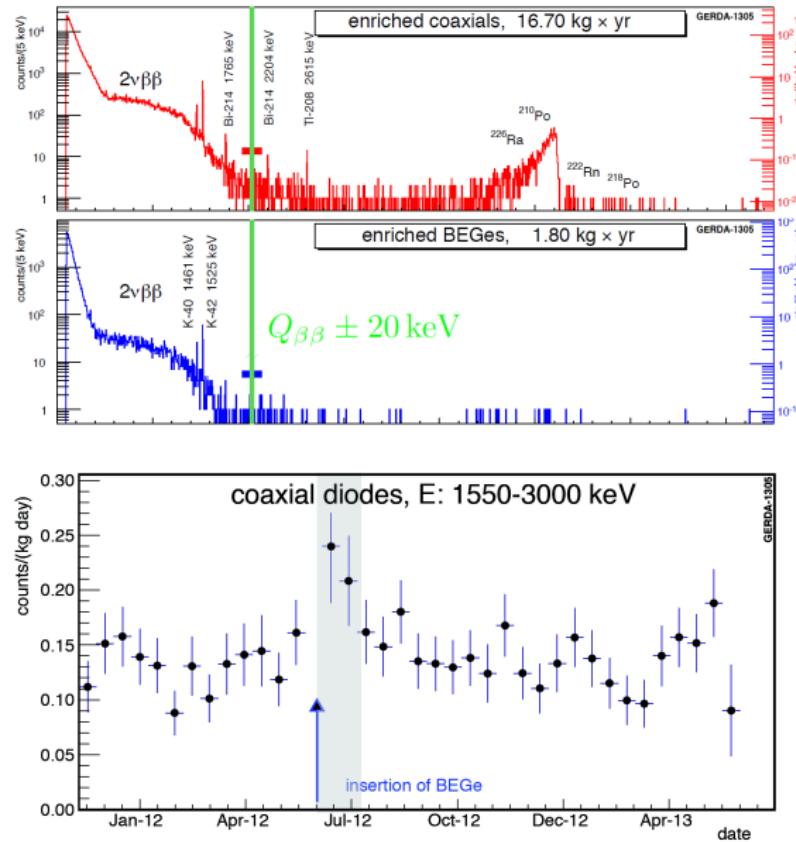

- ▶ Split coaxial data in two sets (Golden and Silver), according to the BI
- ▶ BEGe data kept separated, due to different resolution and background



dataset	exposure [kg·yr]	FWHM @ $Q_{\beta\beta}$ [keV]
Golden	17.90	4.8 ± 0.2
Silver	1.30	4.6 ± 0.2
BEGe	2.40	3.2 ± 0.2

Background models

- ▶ Minimum model containing only known and visible background sources
- ▶ Alternative (maximum) model containing the same isotopes but more possible locations




Both models predict a flat background at $Q_{\beta\beta}$

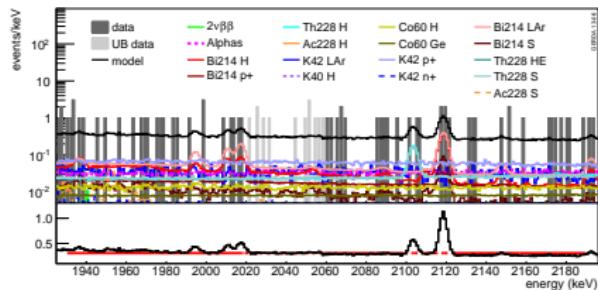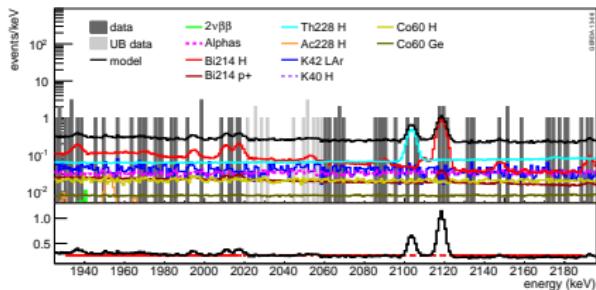

Analysis recipe:

- ▶ Fit with Gaussian peak and flat background in the 1930-2190 keV region, excluding known gamma peaks at 2104 (^{208}TI SEP) and 2119 keV (^{214}Bi).

PSD	Dataset	Obs.	Exp. bkg
no	Golden	5	3.3
	Silver	1	0.8
	BEGe	1	1.0
yes	Golden	2	2.0
	Silver	1	0.4
	BEGe	0	0.1

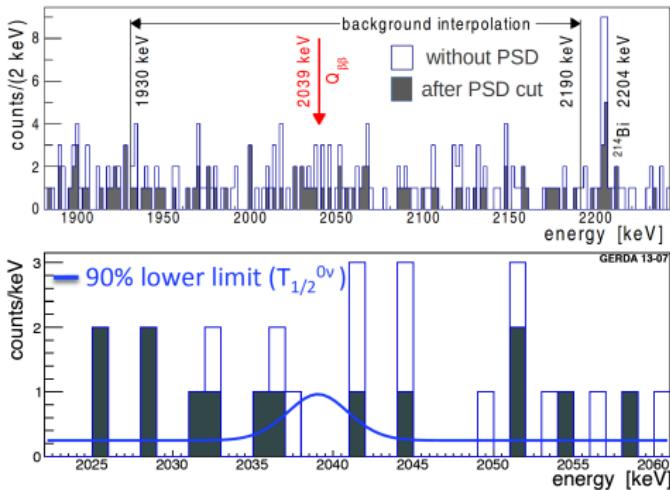

Profile Likelihood Method


- best fit $N^{0\nu} = 0$
- No excess of signal over bkg
- 90% C.L. lower limit:
 $T_{1/2}^{0\nu} > 2.1 \cdot 10^{25} \text{ yr}$
- Median sensitivity: $2.4 \cdot 10^{25} \text{ yr}$

Bayesian Approach

- Flat prior for $1/T_{1/2}^{0\nu}$ in $[0; 10^{-24}] \text{ yr}^{-1}$
- best fit $N^{0\nu} = 0$
- 90% credibility interval:
 $T_{1/2}^{0\nu} > 1.9 \cdot 10^{25} \text{ yr}$
- Median sensitivity: $2.0 \cdot 10^{25} \text{ yr}$

GERDA Collaboration, Phys. Rev. Lett. 111 (2013) 122503

Combination with HdM 2001 and IGEX, Comparison with HdM 2004

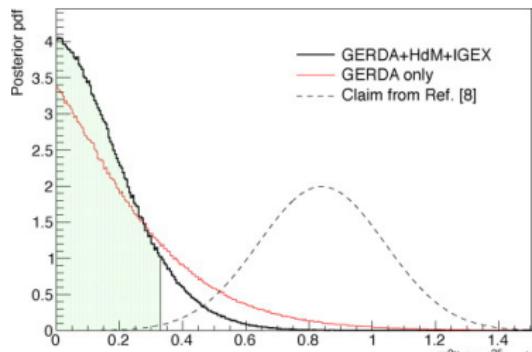



Previous limits

- ▶ HdM 2001: $T_{1/2}^{0\nu} > 1.9 \cdot 10^{25} \text{ yr}$ (90% C.L.)
EPJ A12 (2001) 147-154
- ▶ IGEX 2002: $T_{1/2}^{0\nu} > 1.57 \cdot 10^{25} \text{ yr}$ (90% C.L.)
Phys. Rev. D65 (2002) 092007

Combining the limits

- ▶ Same result with PL and Bayesian approach

$$T_{1/2}^{0\nu} > 3.0 \cdot 10^{25} \text{ yr} \text{ (90\% C.L.)}$$

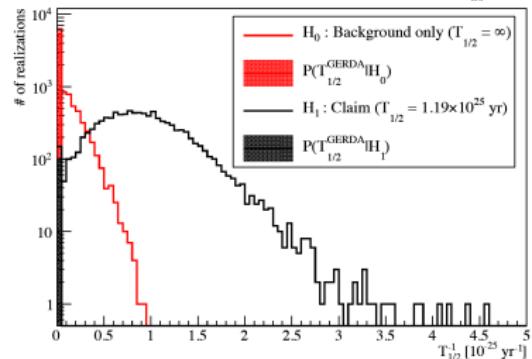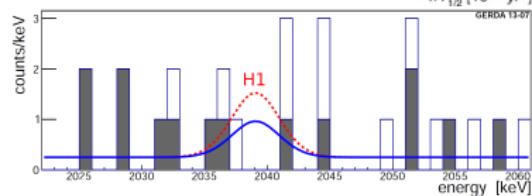


Comparison with Phys. Lett. B 586 198 (2004)

- ▶ Claimed signal with $T_{1/2}^{0\nu} = (1.19^{+0.37}_{-0.23}) \cdot 10^{25} \text{ yr}$
- ▶ H1: claimed signal (5.9 ± 1.4)
- ▶ H0: background only
- ▶ Bayes factor: $P(H1)/P(H0) = 0.024$
- ▶ P-value from PL: $P(N^{0\nu} = 0 | H1) = 0.01$
- ▶ Comparison independent of NME and physical mechanism generating $0\nu2\beta$

Claim strongly disfavored

From arXiv:1404.2616v1:

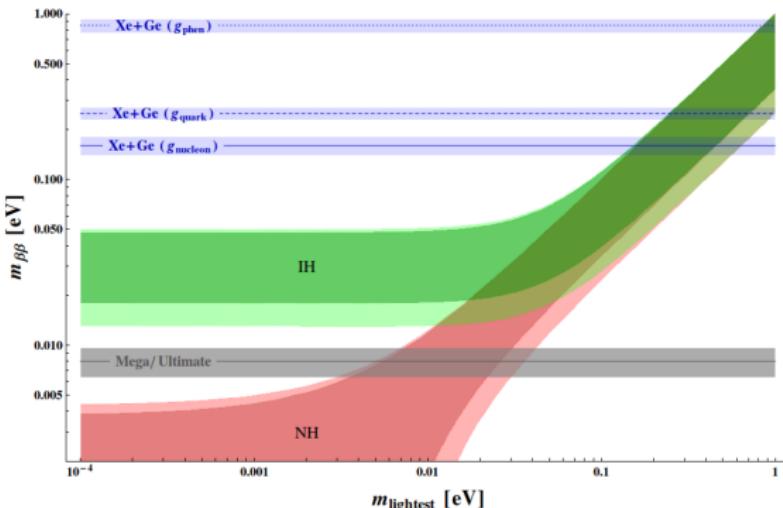

(Near) future experiments:

- ▶ ^{76}Ge : GERDA Phasell, Majorana, GERDA+Majorana
- ▶ ^{136}Xe : Exo-200, nEXO, KamLAND2-Zen, NEXT-100, MAGIX/GraXe
- ▶ Bolometers: CUORE, AMoRE, LUCIFER
- ▶ Other technologies: SNO+, CANDLES, SuperNEMO, DCBA
- ▶ Plus many others...

- ▶ GERDA, KamLAND-Zen and EXO-200 successfully completed their first phase
- ▶ Klapdor's claim strongly disfavoured
- ▶ The field of research is open again to search for $0\nu\beta\beta$ decay




Summary

- ▶ GERDA Phase I data taking successfully completed
- ▶ $2\nu\beta\beta$ decay: $T_{1/2}^{2\nu} = 1.84^{+0.14}_{-0.10} \cdot 10^{21}$ yr
- ▶ $0\nu\beta\beta$ decay: $T_{1/2}^{0\nu} > 2.1 \cdot 10^{25}$ yr (90% CL)



Outlook

- ▶ Upgrade for GERDA Phase II is ongoing
- ▶ Aimed sensitivity: $1.4 \cdot 10^{26}$ yr
- ▶ Slowly approaching the inverted hierarchy land...


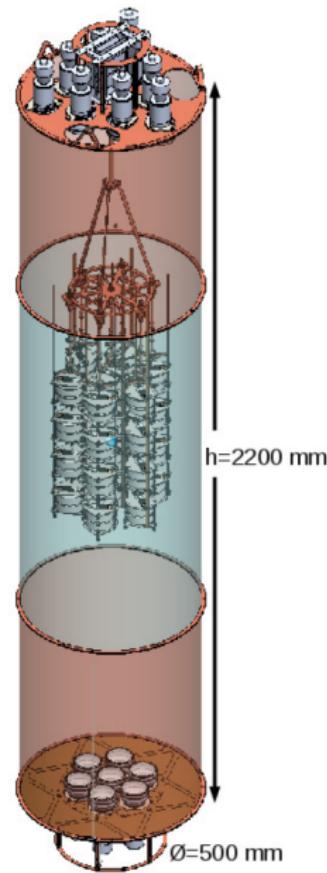


Goal: reach 10^{26} yr sensitivity in $T_{1/2}^{0\nu}$

- ▶ Increase the statistics
 - More active mass (new BEGe detectors)
 - Longer data taking
- ▶ Improve energy resolution
 - Use BEGe detectors
 - Improve shaping filter
- ▶ Reduce Background
 - Cleaner cables and electronics
 - Lighter detector holders
 - Special care in crystal production
 - Reject residual background radiation
 - Improve PSD (BEGe detectors)
 - Read LAr scintillation light

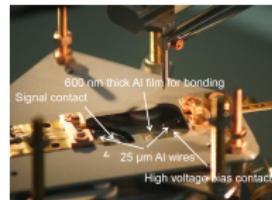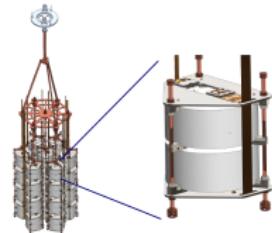


- ▶ PSD: distinguish between ($0\nu 2\beta$) signal-like events (SSE) and background-like events (MSE, p^+ , n^+)
- ▶ Different PSD needed for coaxial and BEGe detectors

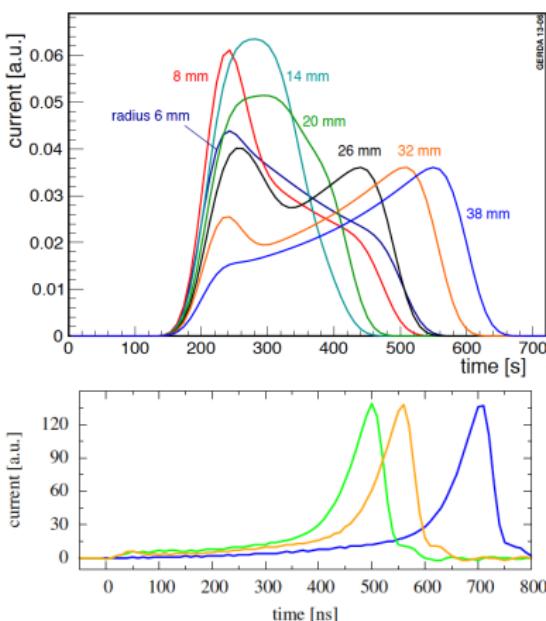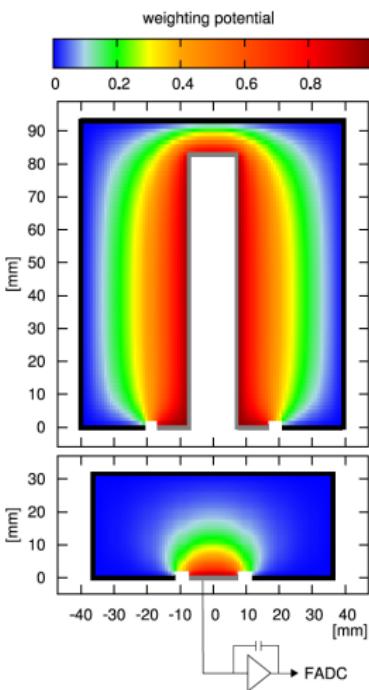

- ▶ Simulated current pulse in coaxial detector
- ▶ Simulated current pulse in BEGe


Coaxial: Artificial Neural Network (ANN)

- ▶ TMVA/TMIPANN applied to time when the pulse reaches 1, 3, ..., 99%
- ▶ SSE training with signal-like ^{208}TI DEP at 1592 keV
- ▶ MSE training with background-like ^{212}Bi FEP at 1621 keV
- ▶ Cut adjusted for each detector to have 90% survival probability on DEP

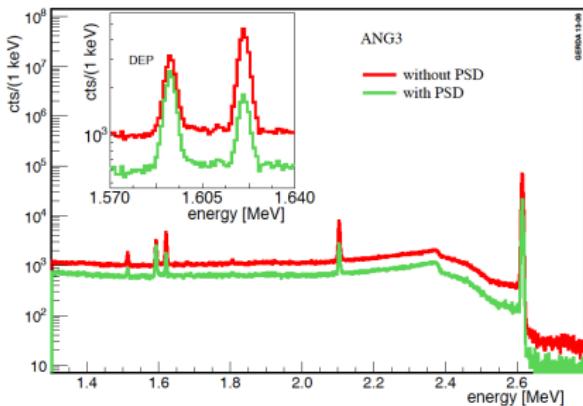

BEGe: A/E

- ▶ **A** = amplitude of current pulse
- ▶ **E** = energy
- ▶ High capability of distinguishing SSE from MSE, p^+ and n^+ events
- ▶ Well tested and documented method*

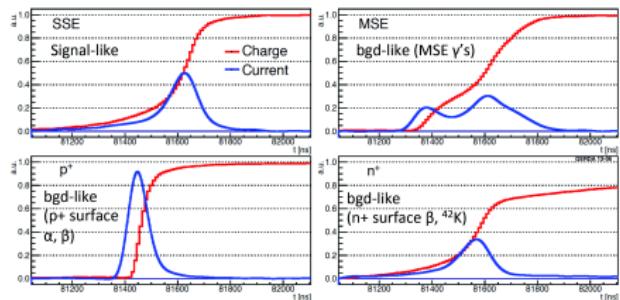

- ▶ Acceptance for $2\nu 2\beta$: 0.91 ± 0.05
- ▶ Acceptance for $0\nu 2\beta$: 0.92 ± 0.02

* JINST 4 (2009) P10007; JINST 3 (2011) P03005; EPJC 73 (2013) 2583

Bonus Slide: Calibration of the GERDA Data

- ▶ Spectra calibrated (bi)-weekly with ^{228}Th sources
- ▶ Data useful also for monitoring the resolution and gain stability over time

